


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Standard:Nylon-6T
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over

Recommended P.C. Board Hole Layout

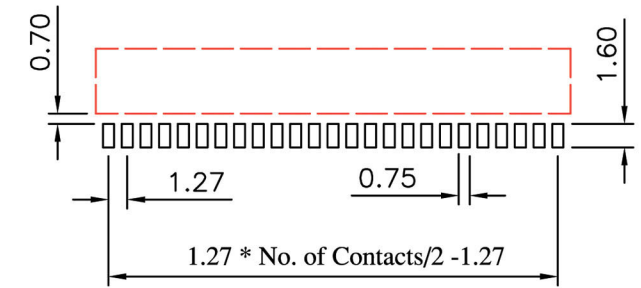

RoHS Compliant		HSM 玄茂科技股份有限公司						
		HSUAN MAO TECHNOLOGY CO., LTD.						
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名 1.27mm FEMALE HEADE SINGLE ROW HORIZONTAL SMT TYPE 1XXXP H:4.4mm(W:2.2mm) GOLD FLASH PLATING BLACK INSULATOR NYLON 6T UL94V-0 BOX PACKING ROHS					
DWG. 製圖		SCALE 比例		<table border="1"> <tr> <td>.X</td> <td>.XX</td> <td>.XXX</td> </tr> <tr> <td>±0.3</td> <td>±0.20</td> <td>±0.100</td> </tr> </table>	.X	.XX	.XXX	±0.3
.X	.XX	.XXX						
±0.3	±0.20	±0.100						
DATE 制表日	Hedy	UNIT 單位	PART NO. 料號 C4834-XXADGHD0R					
2016/04/14		PAGE 張數		SIZE. 紙張尺寸 A 4 REV. 版次 A				