


RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)






Recommended P.C.B Layout(Bottom Side)
(PCB BOARD TOLERANCE±0.05)

Specifications:

- Current Rating: 3Amp
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 600V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +125°C 


Material:

- Contact Material: Phosphor Bronze
- Insulator Material: PA6T, (UL94V-0)

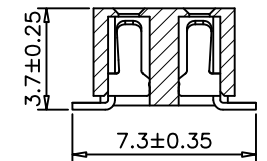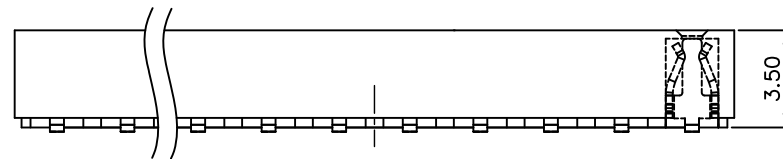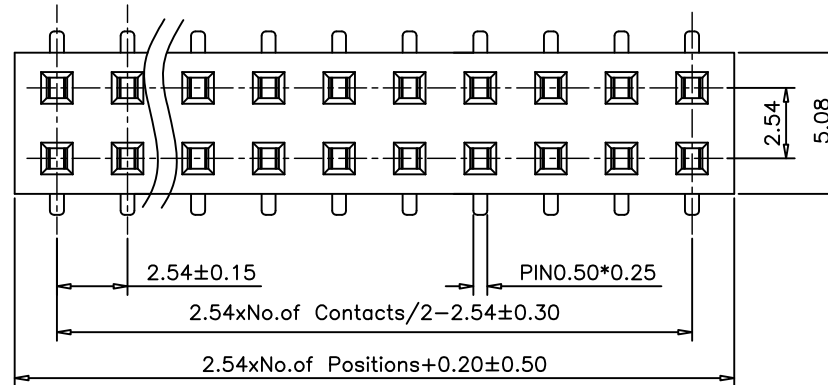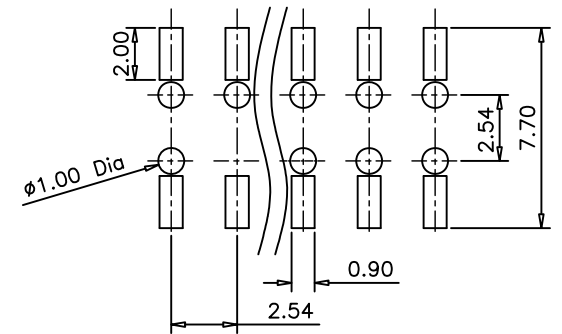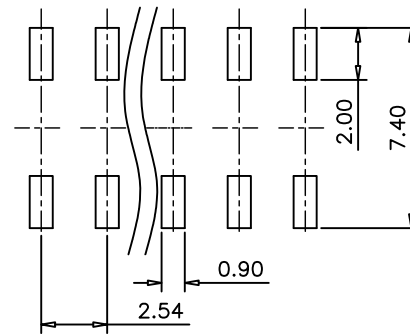

Ordering Information

BT2135 2 ** * * 3A84

- 2=Dual Row
- No.of Pins 04~80
- Contact Plating
U=Gold Flash
S=Tin Plated
- Insulation & Packing
J=PA6T+Tube
K=PA6T+Tape&Reel
I=PA6T+Tray 

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	He ming	May-16-2016	SCALE	-	BMA TECHNOLOGIES LTD	
A2	May-16-2016	Change The Packing	---	---	x.x	±0.45	DESIGN		UNIT	mm	BMA TECHNOLOGIES LTD	
A1	Jul-30-2013	Change The Operation Temperature	---	---	x.xx	±0.30	CHECK	Jim	SHEET	A4		
AO	Jul-9-2012	NEW	---	---	x.xxx	±0.20	APPROVE	Wendy	PROJ.			
											PART NO.	BT21352****3A84
											TITLE:	Pitch:2.54 Female Header Dual Row H:3.50 SMT