

ORDER INFORMATION

5 0 8 2 H - F 0 4 W - L




◎:Standard Recommend

No. of contacts per row

W/Nylon natural

L:ROHS + Nylon 66

SPECIFICATIONS
 Current Rating: 7A A.C./DC
 Voltage Rating: 250V A.C./DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V A.C./minute
 Material: Nylon 66, UL94V-2
 Color: Natural (Translucent)

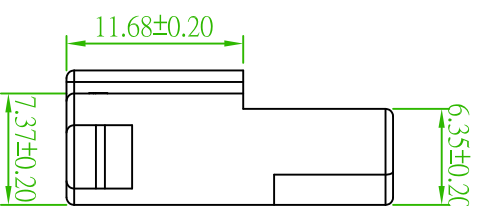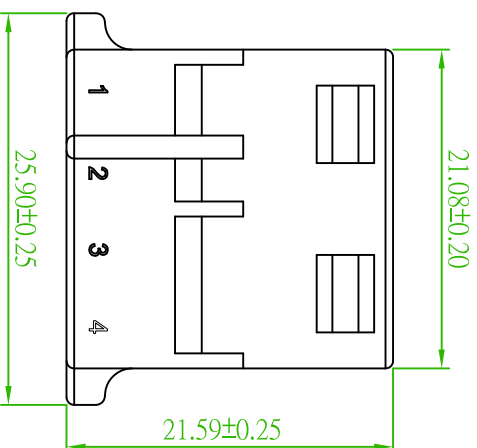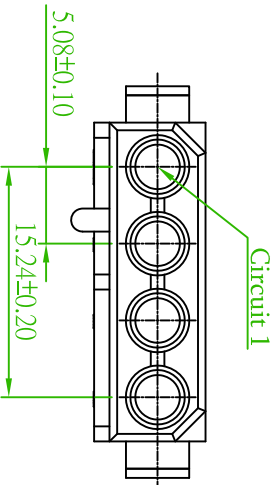

品名 TITLE		5.08mm HOUSING			
品號 PART NO.	5082H-F04W-L				
圖號 DRAWING NO.	5082H-F04W-L				
客戶品號 CUSTOMER P/N					
公差 TOLERANCE	.X ±0.35 .XX ±0.25		單位 UNIT	mm	
日期 DATE	繪圖 DRAWN	版本 REV.	比例 SCALE	核對 CHECKED	核准 APPROVED
11/17/2006	Kent	A	FREE	Paul	James
ARPA	REV.	DESCRIPTION		DATE	

