



ORDER INFORMATION

5 0 8 2 H - M 0 4 W -

◎Standard Recommend

No. of contacts per row
W: Nylon natural
L: RoHS + Nylon 66

SPECIFICATIONS
 Current Rating: 7A A.C./D.C
 Voltage Rating: 250V A.C./D.C
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V A.C./minute
 Material: Nylon 66, UL94V-2
 Color: Natural (Translucent)

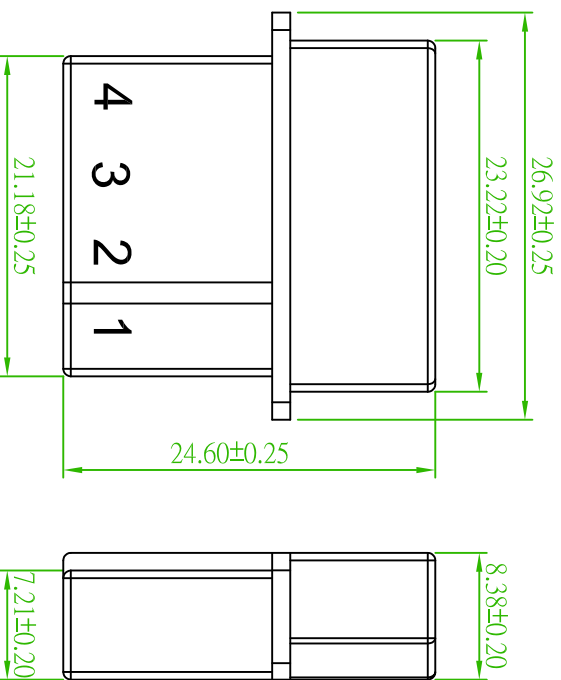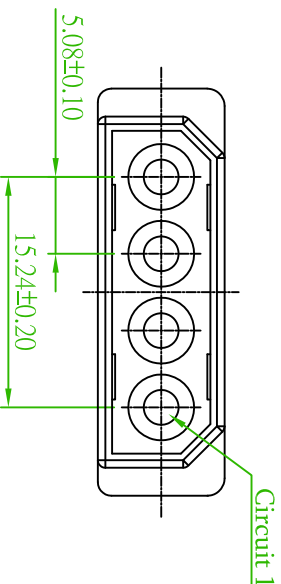

品名 TITLE		5.08mm HOUSING			
品號 PART NO.	5082H-M04W-L				
圖號 DRAWING NO.	5082H-M04W-L				
客戶品號 CUSTOMER P/N					
公差 TOLERANCE	.X ±0.35 .XX ±0.25				
版本 REV.	A				
比例 SCALE	FREE				
單位 UNIT	mm				
日期 DATE	11/20/2006				
繪圖 DRAWN	Kent				
核對 CHECKED	Paul				
核准 APPROVED	James				
ARPA	DESCRIPTION				
REV.	DATE				

耀德企業有限公司
 Amitek Technology Co., Ltd.
 TEL: 886-2-2268-8036
 FAX: 886-2-2268-8035