

# ORDER INFORMATION

## SPECIFICATIONS

Insulation Resistance: 1000MΩ Min.  
 Dielectric Voltage: 1500V AC for one minute  
 Operation Temperature: -25°C to +85°C

## MATERIAL


Insulator: Nylon 66, UL94V-2

5 H 5 0 3 0 F X - 2 X X W B L 0 0 D 0 1


0:W/O Ear 1:With Ear	2: Dual Row	No. of Contacts per Row(02-03)	W:Natural	B:Bag	RoHS
-------------------------	-------------	--------------------------------	-----------	-------	------



5H5030F1-203WBL00D01  
2x3 Pin, With Ear

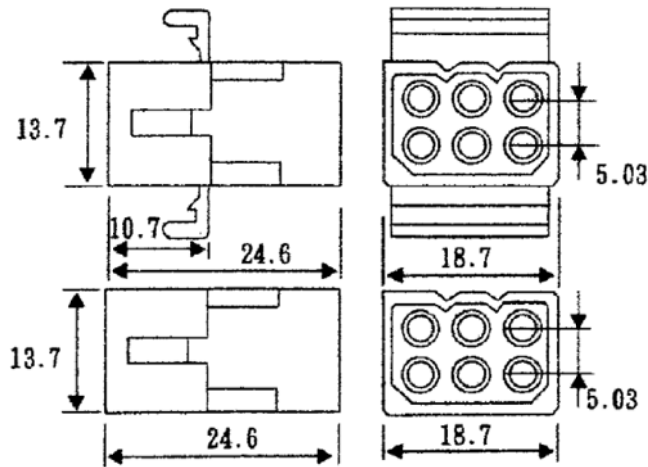

5H5030F1-202WBL00D01  
2x2 Pin, With Ear

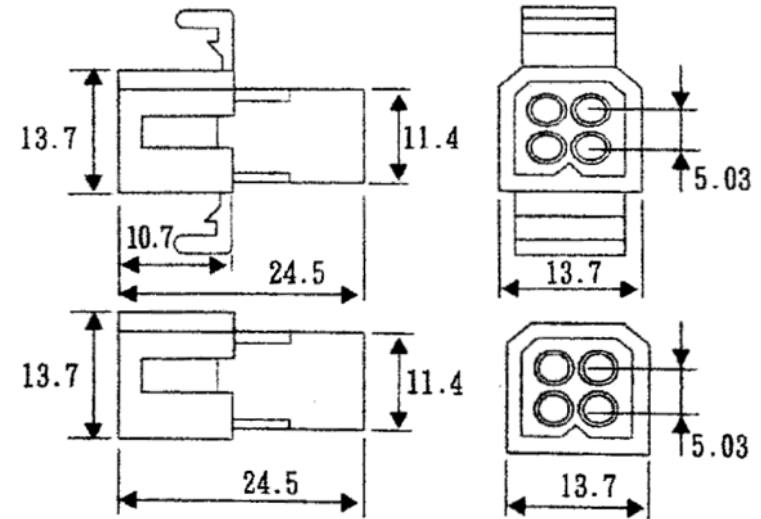


5H5030F0-203WBL00D01  
2x3 Pin, W/O Ear

5H5030F0-202WBL00D01  
2x2 Pin, W/O Ear

Old P/N: 5030H-X2XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.03mm HOUSING WIRE SIDE			頁數 Page	1/1
	品號 PART NO.	5H5030FX-2XXWBL00D01			繪圖 DRAWN	Joe 2011/10/19
	圖號 DRAWING NO.	GW097-GB064	版本 REV.	A	核對 CHECKED	Alvin 2011/10/19
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2011/10/19
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	