


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 185.1mm
- Effective Area (A_e): 774.6mm²
- Effective Area (A_{Min}): -----mm²
- Effective Volume (V_e): 143378mm³


Approximate weight (without Gap):680.0g/Set



EE8040 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=20/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_v (W/set)	Ordering code
CF196	2000 \pm 20%	8500 +30%/-20%	≤ 14.34 (200mT,16kHz, 100°C)	CF196EE8040 OL
CF139	2100 \pm 20%	8700 +30%/-20%	≤ 10.71 (100mT,100kHz, 100°C)	CF139EE8040 OL
CF297	2300 \pm 20%	9300 +30%/-20%	≤ 9.64 (100mT,100kHz, 100°C)	CF297EE8040 OL

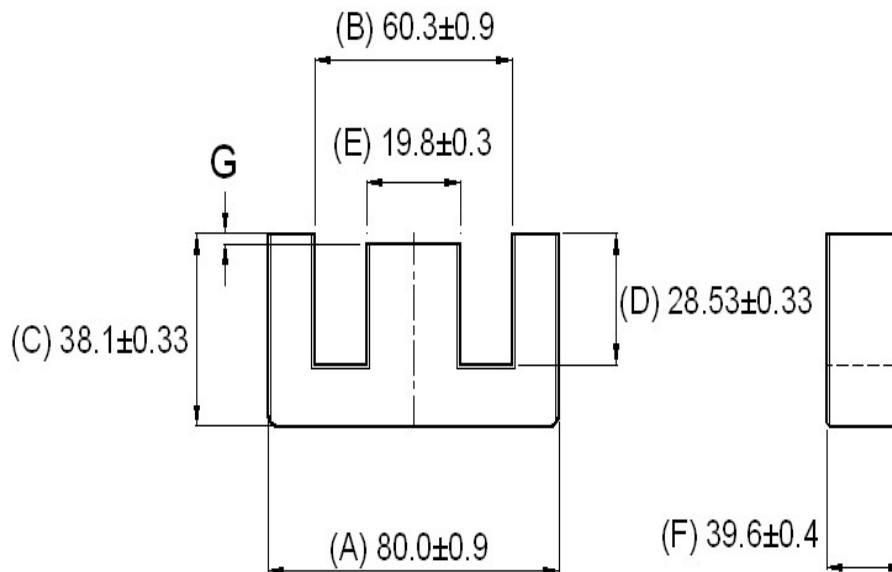

Remarks: Value of "G" is Zero (0) for Un-Gapped Cores, for Gapped Cores the value of "G" varies as per the Gap/AL value

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf