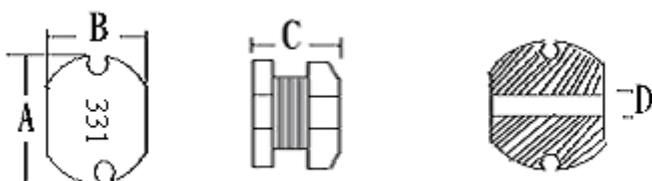
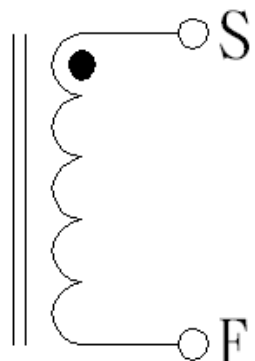


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: FPI1005-331K		DWG.NO: MY2126235	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	10.0 ± 0.3 m/m
		B	9.0 ± 0.3 m/m
		C	5.4 ± 0.4 m/m
		D	3.1 (REF) m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	330 ± 10%		
RDC (Ω)	1.15 (MAX)		
IDC (A)	0.68 (MAX)		
TEST CONDITION	1KHZ / 0.25V		
(4)REMARK CORE:N5D DR10×5.4 B3.8 F2.6 WIRE:2UEW Φ0.23mm*80.5TS(REF)		APPROVED BY 吳載敏	
		CHECKED BY 張明德	
		DRAWN BY 黃慧診	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: FPI1005-331K				DWG.NO: MY2126235			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHZ / 0.25V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	330 ± 10%	1.15 (MAX)	0.68 (MAX)	10.0 ± 0.3	9.0 ± 0.3	5.4 ± 0.4	
1	326.5	0.71	OK	9.94	9.01	5.44	
2	333.3	0.71	OK	9.93	9.06	5.47	
3	334.7	0.71	OK	9.96	9.06	5.46	
4	331.2	0.71	OK	9.94	9.07	5.44	
5	327.3	0.71	OK	9.93	9.05	5.47	
6	331.3	0.71	OK	9.94	9.04	5.44	
7	335.4	0.70	OK	9.93	9.04	5.47	
8	331.7	0.71	OK	9.96	9.01	5.47	
9	332.5	0.71	OK	9.96	9.03	5.47	
10	327.7	0.71	OK	9.97	9.04	5.46	
\bar{X}	331.2	0.71		9.95	9.04	5.46	
R	8.9	0.01		0.04	0.06	0.03	
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				吳載敏			
				CHECKED BY			
				張明德			
				DRAWN BY			
				黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw