
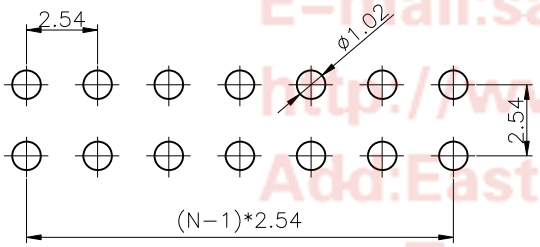
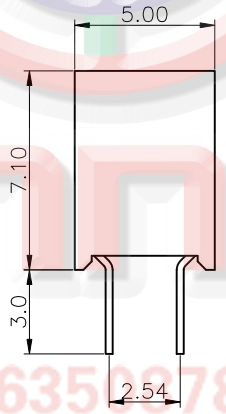
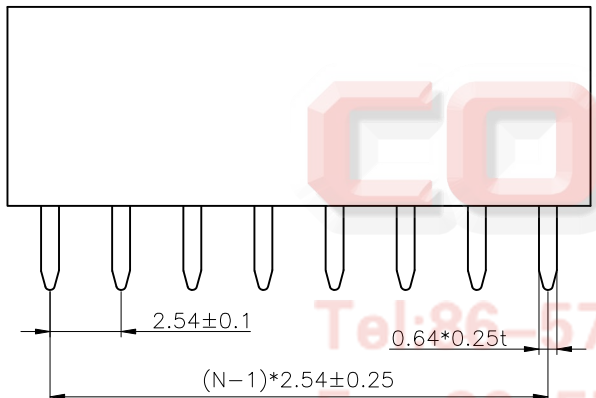


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/14/09'	~	LJC 09/14/09'
B	DRAWING UPDATE	JLZ 09/18/16'	~	

N=NUMBER OF CONTACTS/2

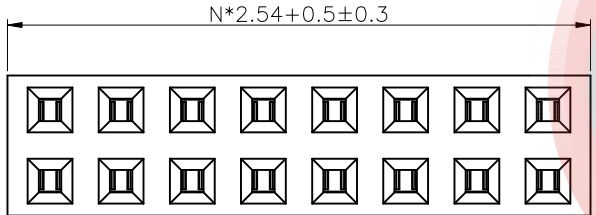

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: -40°C~+105°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:3A.
- PART NUMBER: DS1023-09
- PRODUCT NUMBER CODE:
DS1023-09 - X X X


- CONTACT PLATING
8: Full glod flash
- MOUNTING TYPE
V: V/T type
- No.of Contacts
2*2~2*40

Tel:86-574-63509787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
<http://www.connfly.com>
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALE HEADER PITCH	
UNITS	mm	2.54mm V/T TYPE H=7.1mm	
SHEET SIZE	A4	SERIES	DS1023-09 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-09-XXX-B		

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD