

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/12/06'		LJC 09/12/06'
B	ADD DIM TYPE	JLZ 01/19/16'		LJC 01/19/16'
C	DRAWING UPDATE	JLZ 07/14/16'		




NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL94 V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.


3. PRODUCT NUMBER CODE:

DS1029-06 - X X X X X X X X - X

- PLATING LEVEL
- B: LEVEL B
- 3A: LEVEL 3A
- POST SUPPORT
- S: W/ POST
- X: W/O POST
- PACKING TYPE
- R: TAPE ON REEL
- B: TUBE
- PICK UP SUPPORT
- S: W/ PICK UP
- X: W/O PICK UP
- DIM.A B H1 H2 TYPE
- 1: TYPE 1
- A*/B*/H1:*/H2:*
- MOUNTING TYPE
- S: SMT TYPE
- HOUSING COLOR
- B:BLACK
- CONNECTOR PLATING
- 8: FULL GOLD FLASH
- CONECT TYPE
- P:PLUG
- No.OF CONTACTS
- 2*2-2*40

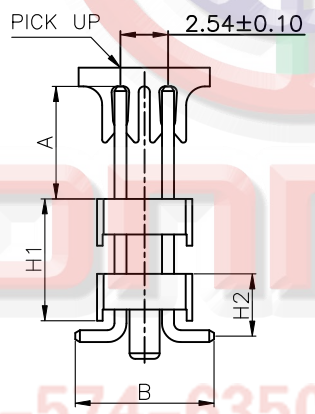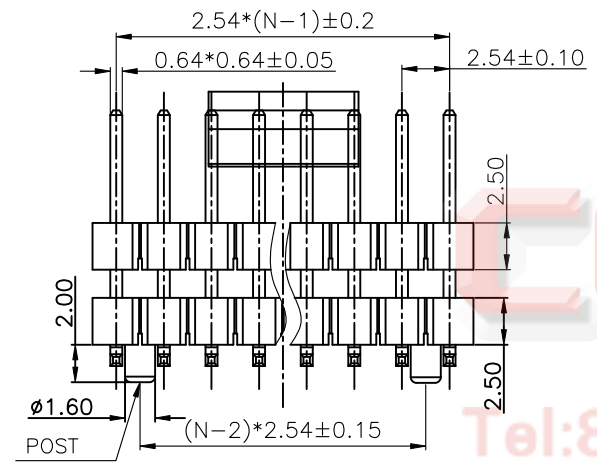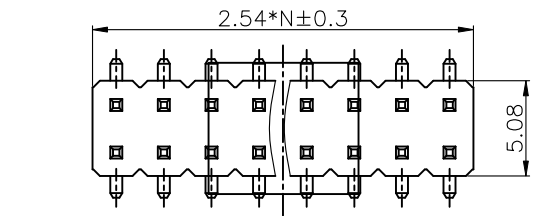

N:NUMBER OF CONTACTS/2

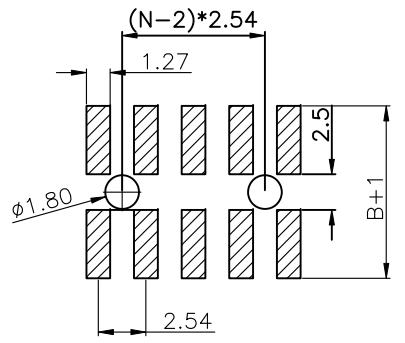

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM B	DIM H1	DIM H2	PIN LENGTH
1	6.00	7.40	6.50	3.36	15.30
2	6.00	7.40	15.00	3.36	23.80
3	5.80	7.40	6.50	3.81	15.60
4	8.00	7.62	17.70	3.36	28.50
5	11.00	7.40	7.36	3.36	21.20
6	11.40	7.40	6.40	3.90	21.20
7					
8					
9					
10					
11					

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1029-06-XXXXXX-C		

PROJECTION		TITLE	2.54mm PITCH PIN HEADER
UNITS	mm		DUAL ROW S.M.T
SHEET SIZE	A4	SERIES	DS1029-06 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail: connfly@connfly.com
<http://www.connfly.com>
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333