# DEGSON ELECTRONICS CO., LTD.

**Product Specification**

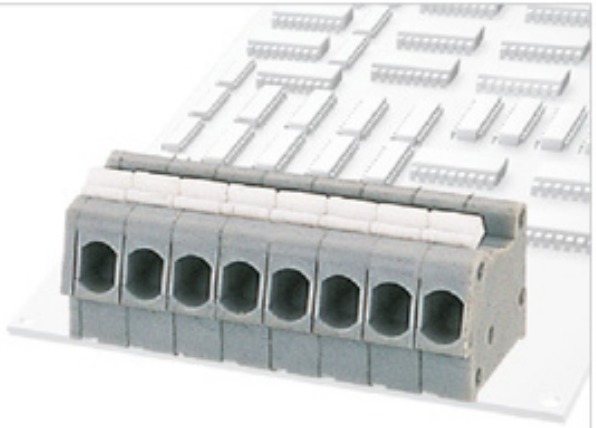

**DG210-3.5**

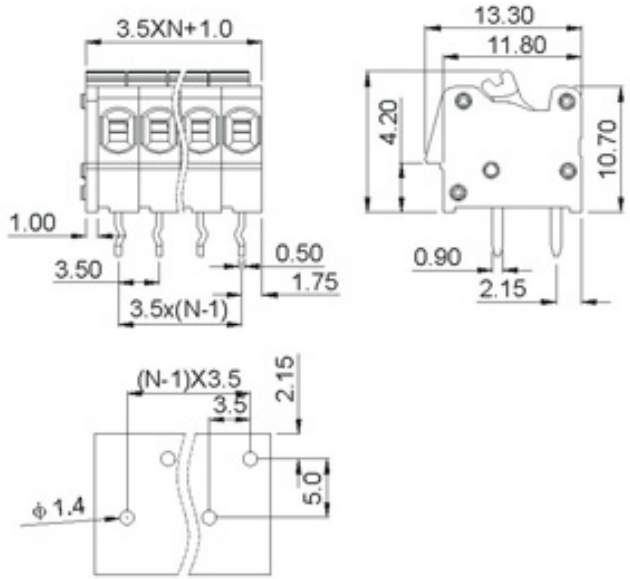


| Approval | in the course of application | |
|---|---|---|
| **Electrical** | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 5A | 2A |
| Wire range | 20-16AWG | 0.2-1.5mm² |
| With standing voltange | AC2000V/1Min | |
| **Mechanical** | | |
| Ambient temperature | -40°C~+105°C | |
| Strip length | 8-9mm | |
| **Dimensions** | | |
| Pitch | 3.5mm(.138″) | |
| Poles | 1P-XXP | |
| **Material** | | |
| Housing | PA66, UL94V-0 | |
| Pin header | Brass,Tin plated | |
| Wire guard | Stainless steel | |

## HOW TO ORDER

DG210-3.5 – □□ P – □□ – X X X Customer Request

Series Number

Number of Pole

| | |
|---|---|
| 1 | Single pitch |
| 2 | Double pitch |

Color

| | | | | | |
|---|---|---|---|---|---|
| 1 | Grey | 4 | Green | 7 | Trans-parent |
| 2 | Blue | 5 | Orange | 8 | Yellow |
| 3 | Black | 6 | Red | 9 | White |

| | |
|---|---|
| MM (INCH) | DEGSON ELECTRONICS CO., LTD. |
| THIRD ANGLE PROJECTION | NAME DG210-3.5 |