
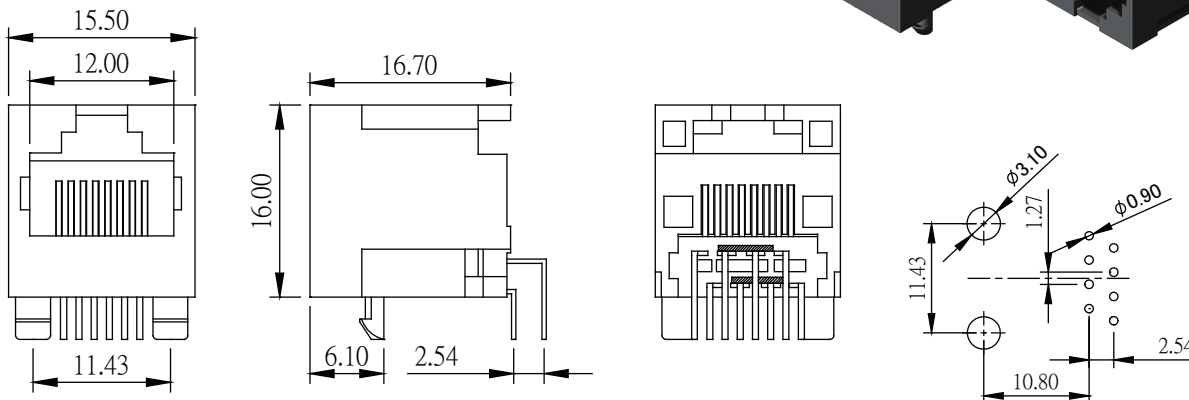


Modular Jack Side Entry H=16.0 W=16.7

Material&Finish

Housing:P.B.T, UL 94V-0, Black
 Contact :0.35x0.42mm Thickness Phosphor Bronze,
 Gold Plated Over Nickel on Contact Area,
 Tin plated over Nickel on solder area.

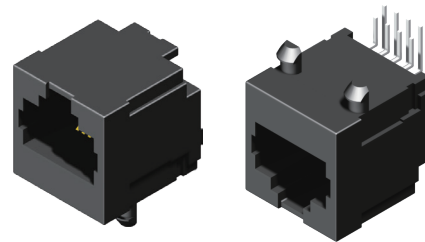

Order Information

5 R J 1 D R 0 0 N 0 N - 8 8 X X 0 0 L - 276 - A 1

- 5: N:W/O Ear
- R: Number of Positions: 8:8 Positions
- J: Number of Contacts: 8:8 Contacts
- 1: Selective flash (S0)
- D: Selective 6u" (SA)
- R: Selective 10u" (SB)
- 0: Selective 20u" (SC)
- 0: Selective 30u" (SD)
- N: Selective 15u" (SF)
- 0: Selective 50u" (S5)
- : L:RoHS + PBT+Tray
- 8: Series No.
- X: Selective flash (S0)
- X: Selective 6u" (SA)
- 0: Selective 10u" (SB)
- 0: Selective 20u" (SC)
- L: Selective 30u" (SD)
- : Selective 15u" (SF)
- 276: Series No.
- : L:RoHS + PBT+Tray
- A: Standard (1)
- 1: Offset Latch (3)



Recommended PCB Layout (PCB TOLERANCE ±0.05)

OldP/N:276N-8P8C

Modular Jack Side Entry H=12.5 W=17.3

Material&Finish

Housing:P.B.T, UL 94V-0, Black
 Contact :0.35mm Thickness Phosphor Bronze,
 Gold Plated Over Nickel on Contact Area,
 Tin plated over Nickel on solder area.

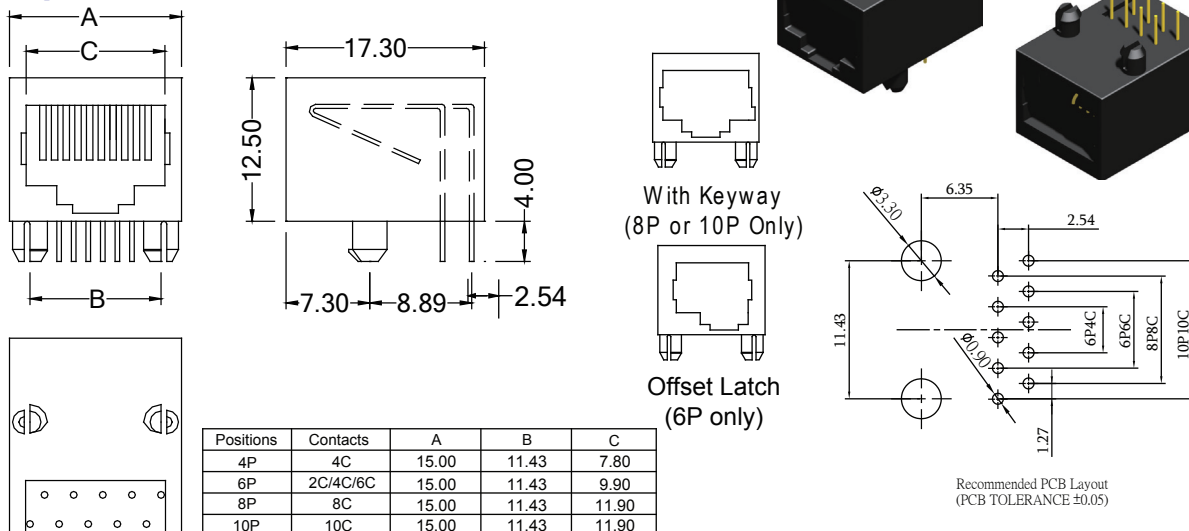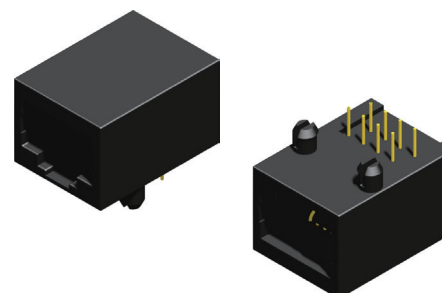

Order Information

5 R J 1 D R 0 0 N 0 N - X X X X 0 0 L - 280 - A X

- 5: N:W/O Ear
- R: Number of Positions: 4:4 Positions, 6:6 Positions, 8:8 Positions, A:10 Positions
- J: Number of Contacts: 2:2 Contacts, 4:4 Contacts, 6:6 Contacts, 8:8 Contacts, A:10 Contacts
- 1: Selective flash (S0)
- D: Selective 6u" (SA)
- R: Selective 10u" (SB)
- 0: Selective 20u" (SC)
- 0: Selective 30u" (SD)
- N: Selective 15u" (SF)
- 0: Selective 50u" (S5)
- : L:RoHS + PBT+Tray
- X: Series No.
- X: Selective flash (S0)
- X: Selective 6u" (SA)
- 0: Selective 10u" (SB)
- 0: Selective 20u" (SC)
- L: Selective 30u" (SD)
- : Selective 15u" (SF)
- 280: Series No.
- : L:RoHS + PBT+Tray
- A: Standard (1)
- X: With Keyway (2)
- X: Offset Latch(6P Only) (3)

Old P/N:280N-XPXC