

\*\*\* 2509 H Series \*\*\*

RoHS COMPLIANT

Material:

Insulator: UL94V-0 Nylon 6/6

Contact: Brass



2509P \*\* H \* 00  
 $\frac{1}{1} \frac{2}{2}$

1.No.of circuits


2.Plating:

0= Tin plated 120u" min over 30u"min. nickel overall

U= Gold flash over 30u"min. nickel overall

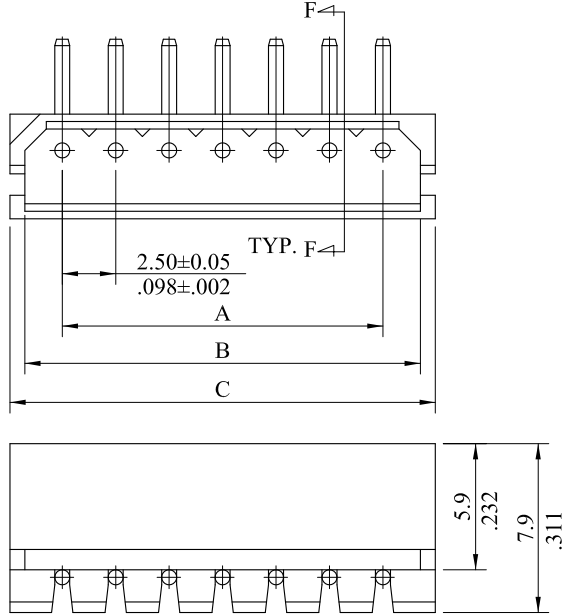

RECOMMENDAND HOLE PATTERN

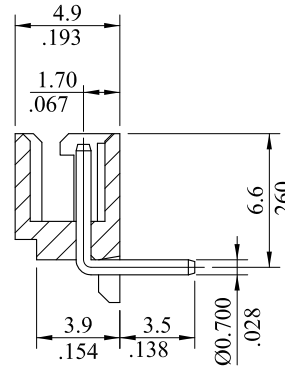

SECTION : F-F

Circuits	Part No.	Dim.A	Dim.B	Dim.C
2	2509P02H*00	2.500(.098)	6.00(.236)	7.4(.291)
3	2509P03H*00	5.000(.197)	8.50(.335)	9.9(.390)
4	2509P04H*00	7.500(.295)	11.00(.433)	12.4(.488)
5	2509P05H*00	10.000(.394)	13.50(.531)	14.9(.587)
6	2509P06H*00	12.500(.492)	16.00(.630)	17.4(.685)
7	2509P07H*00	15.000(.591)	18.50(.728)	19.9(.783)
8	2509P08H*00	17.500(.689)	21.00(.827)	22.4(.882)
9	2509P09H*00	20.000(.787)	23.50(.925)	24.9(.980)
10	2509P10H*00	22.500(.886)	26.00(1.024)	27.4(1.079)
11	2509P11H*00	25.000(.984)	28.50(1.120)	29.9(1.117)
12	2509P12H*00	27.500(1.083)	31.00(1.220)	32.4(1.276)
13	2509P13H*00	30.000(1.181)	33.50(1.319)	34.9(1.374)
14	2509P14H*00	32.500(1.280)	36.00(1.417)	37.4(1.472)
15	2509P15H*00	35.000(1.378)	38.50(1.516)	39.9(1.571)

				LEOCO CORPORATION		APPROVED:		PART NO.:																			
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		2509P**H*00																			
D	ES101254					CHECKED:		TITLE:																			
				<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr><th></th><th>mm</th><th>inch</th></tr> </thead> <tbody> <tr><td>1 PLACE</td><td>± 0.30</td><td>± --</td></tr> <tr><td>2 PLACES</td><td>± 0.20</td><td>± .012</td></tr> <tr><td>3 PLACES</td><td>± 0.10</td><td>± .008</td></tr> <tr><td>4 PLACES</td><td>± --</td><td>± .004</td></tr> </tbody> </table>			mm	inch	1 PLACE	± 0.30	± --	2 PLACES	± 0.20	± .012	3 PLACES	± 0.10	± .008	4 PLACES	± --	± .004	DATE:		DRAWING NO.:				
	mm	inch																									
1 PLACE	± 0.30	± --																									
2 PLACES	± 0.20	± .012																									
3 PLACES	± 0.10	± .008																									
4 PLACES	± --	± .004																									
C	ES061012			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr><th></th><th>mm</th><th>inch</th></tr> </thead> <tbody> <tr><td>1 PLACE</td><td>± 0.30</td><td>± --</td></tr> <tr><td>2 PLACES</td><td>± 0.20</td><td>± .012</td></tr> <tr><td>3 PLACES</td><td>± 0.10</td><td>± .008</td></tr> <tr><td>4 PLACES</td><td>± --</td><td>± .004</td></tr> </tbody> </table>			mm	inch	1 PLACE	± 0.30	± --	2 PLACES	± 0.20	± .012	3 PLACES	± 0.10	± .008	4 PLACES	± --	± .004	DRAWN:		250901S				
	mm	inch																									
1 PLACE	± 0.30	± --																									
2 PLACES	± 0.20	± .012																									
3 PLACES	± 0.10	± .008																									
4 PLACES	± --	± .004																									
B	E970287			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr><th></th><th>mm</th><th>inch</th></tr> </thead> <tbody> <tr><td>1 PLACE</td><td>± 0.30</td><td>± --</td></tr> <tr><td>2 PLACES</td><td>± 0.20</td><td>± .012</td></tr> <tr><td>3 PLACES</td><td>± 0.10</td><td>± .008</td></tr> <tr><td>4 PLACES</td><td>± --</td><td>± .004</td></tr> </tbody> </table>			mm	inch	1 PLACE	± 0.30	± --	2 PLACES	± 0.20	± .012	3 PLACES	± 0.10	± .008	4 PLACES	± --	± .004	DATE:		UNITS	SCALE	SIZE	SHEET	REV.
	mm	inch																									
1 PLACE	± 0.30	± --																									
2 PLACES	± 0.20	± .012																									
3 PLACES	± 0.10	± .008																									
4 PLACES	± --	± .004																									
A	DWG REL			ANGULAR ± ( 1° )				mm	3:1	A4	1/1	D															
REV.	ECO. NO.	CHG.	APP.					inch																			