
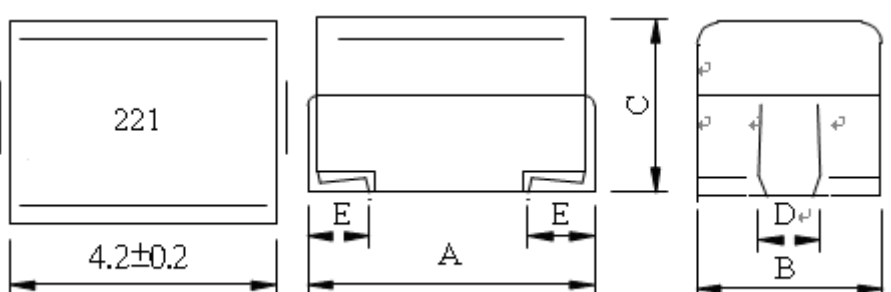








# SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:							
PART NO: WCI4532-221J-N				DWG.NO: TS4599864							
CUSTOMER PART NO:				CUST.DWG.NO:							
(1) DIMENSIONS (UNIT: mm)  				A	$4.5 \pm 0.3$	m/m					
				B	$3.2 \pm 0.2$	m/m					
				C	$3.2 \pm 0.2$	m/m					
				D	$1.2 \pm 0.2$	m/m					
				E	$1.0 \pm 0.2$	m/m					
				F		m/m					
				G		m/m					
				H		m/m					
				I		m/m					
				J		m/m					
				(2) ELECTRICAL REQUIREMENTS				(3) REMARK  			
Q	40 (MIN)	TEST FREQ	0.796MHZ								
RDC ( $\Omega$ )	10 (MAX)	TEST FREQ									
IDC (mA)	100 (MAX)	TEST FREQ									
TEST INSTRUMENTS HP4194A 502BC				APPROVED BY 							
				CHECKED BY 							
				DRAWN BY 							

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :				DATE :					
PART NO: WCI4532-221J-N				DWG.NO: TS4599864					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	L (uH)	RDC (Ω)	IDC (mA)						
FREQ	0.796MHZ								
SPEC	220 ± 5%	10 (MAX)	370 (MAX)						
1	222.6	7.55	OK						
2	223.0	7.60	OK						
3	219.6	7.56	OK						
4	221.6	7.53	OK						
5	220.0	7.35	OK						
6	219.3	7.55	OK						
7	221.7	7.60	OK						
8	221.5	7.56	OK						
9	213.7	7.53	OK						
10	220.5	7.35	OK						
X	220.4	7.52							
R	9.3	0.25							
						APPROVED BY			
									
						CHECKED BY			
									
						DRAWN BY			
									

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw