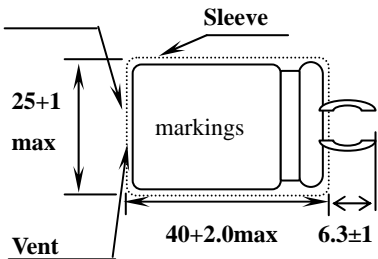



Aluminum Electrolytic Capacitor Specification				
Series	K3J	400 V 220 μ F	Part No.	K3J-400V221MN400
Issue No.			Case size	Φ D 25 X L 40
Specification	Items		Standard	
	Operating temperature range		-25 ~ + 105 $^{\circ}$ C	
	Capacitance tolerance		\pm 20%(20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.15 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 1760 μ A (20 $^{\circ}$ C 400 V 5 min)	
	Ripple current (MAX)		1100mArms (120Hz , 105 $^{\circ}$ C)	
	Load life		2000 hrs	
Outline	Sleeving pipe basic		PVC	
	(Dimensions)			
	<div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Piece</p>  </div> <div style="flex: 1; text-align: center;">  </div> <div style="flex: 1; text-align: right; margin-left: 20px;"> <p>(unit): mm</p> </div> </div>			
Recorder	(The first edition) :2017-7-1			
Wrote by: LUOLI		Checked by: DINGCHANGHUA		Approved by: SHENZHIHONG