

1

2


3

4

5

6

MARK	ECN	DESCRIPTION	DRAW.	DATE

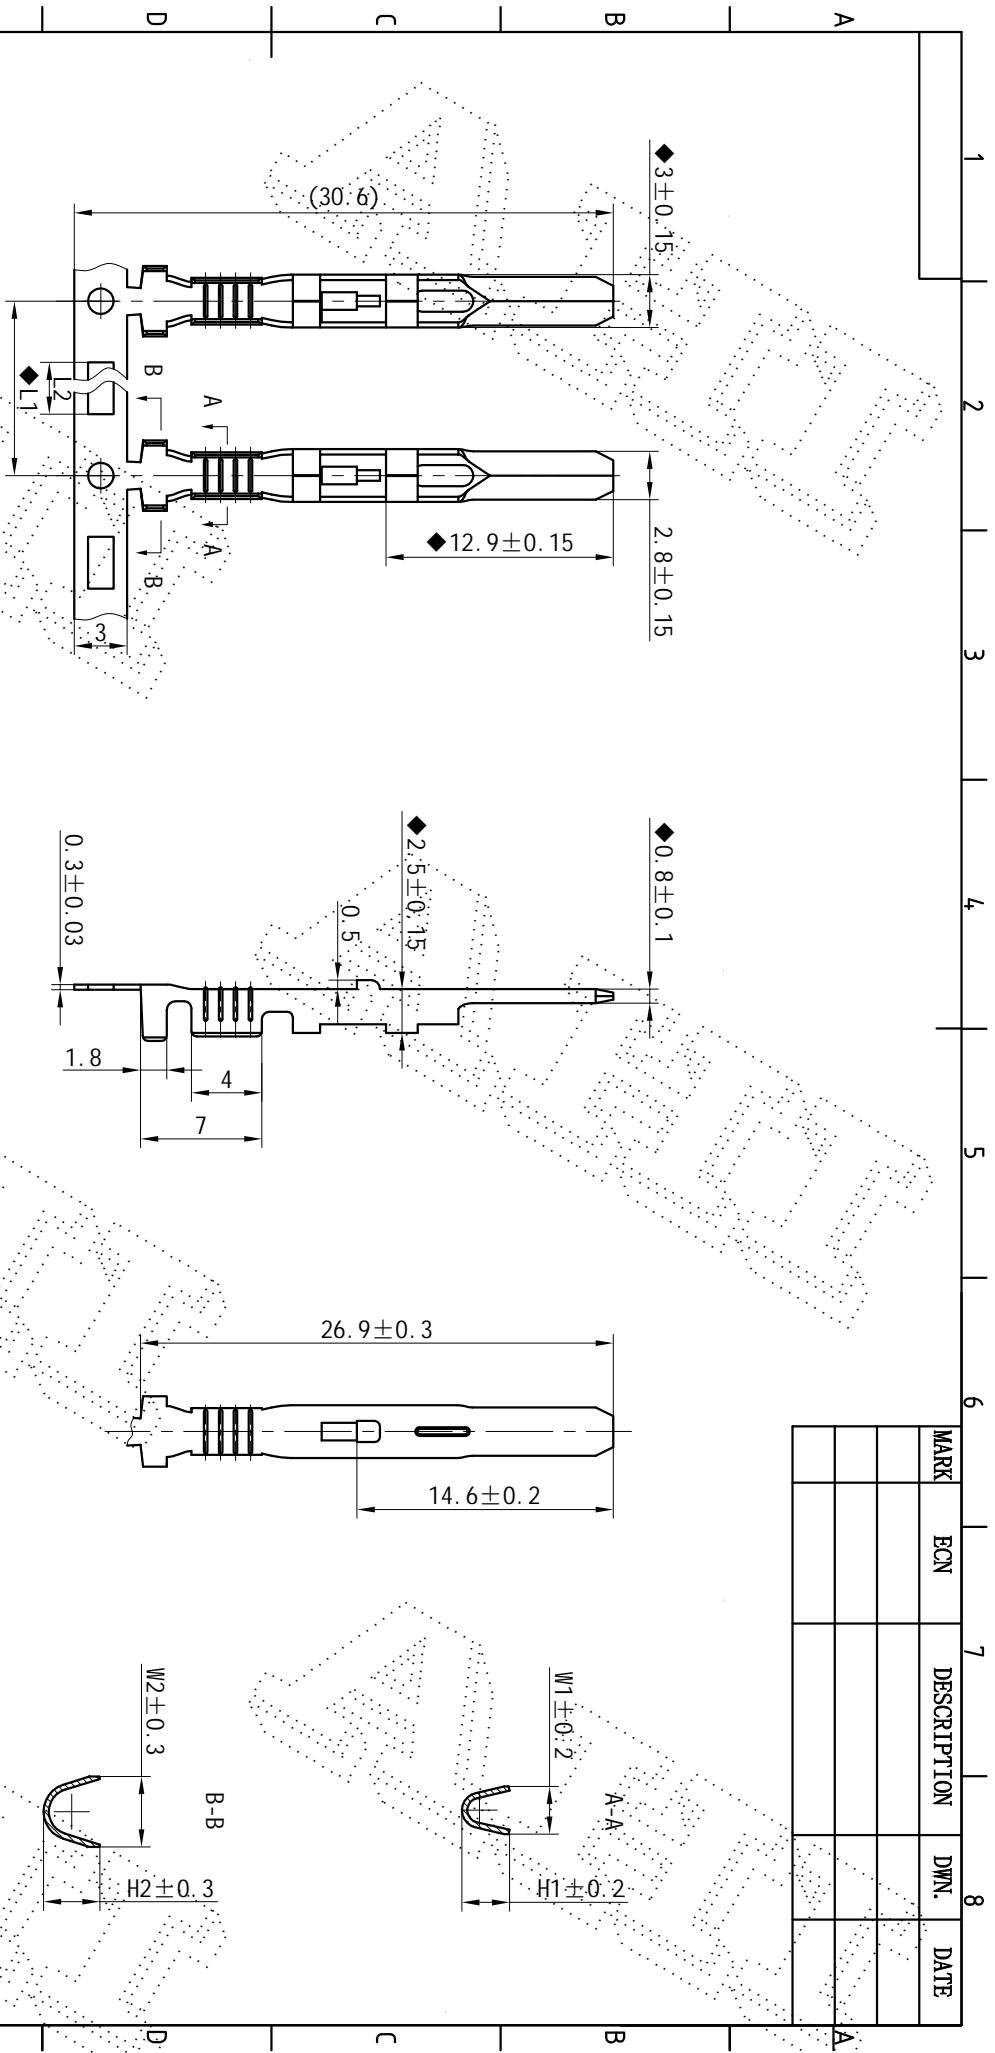

- E
- Surface of salt pieces are not allowed to have obviously scratch, crack, deformation, etc. Stamping defects, Chamfering clear, Stamping phi. front are both less than 0.02mm.
 - The rounded corners R without marked is R0.2mm to R0.5mm.
 - Product embossing and reinforcement depth is 0.08mm to 0.1mm.
 - ◆ means important features, ★ means the key features.
 - Table of Dimension tolerance which wasn't indicate GB/T15055-2007-m.
 - Strip cannot have bending phenomenon.
- NO. TOLERANCES GB/T15055-2007-m
- | DIM. RANGE | DIM. TOLERANCES | SURFACE TREATMENT TIN-PLATED | | | | | | | | | | | |
|------------|-----------------|------------------------------|----------------|----------|-----|-----|-----|-----|------|----|-------------|-----------------------------------|----------------------------------|
| | | 乐清市奥海电气有限公司 | | | | | | | | | | | |
| 0.5~3 | ± 0.20 | (2) | DJ614-2.8*0.8D | | 3.6 | 5.7 | 4.4 | 5.3 | 13.2 | 4 | TYPE | MATERIAL BRASS t0.3 | Yueqing Aohai Electric Co., Ltd. |
| >3~6 | ± 0.30 | (1) | DJ614-2.8*0.8A | | 2.7 | 4.0 | 2.7 | 3.2 | 9.9 | 3 | ARTICLE NO. | DRAWN BY CONFIRMED BY APPROVED BY | |
| >6~30 | ± 0.40 | NO. | TYPE | PART NO. | W1 | W2 | H1 | H2 | L1 | L2 | MOULD NO. : | | |
| >30~120 | ± 0.50 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |