

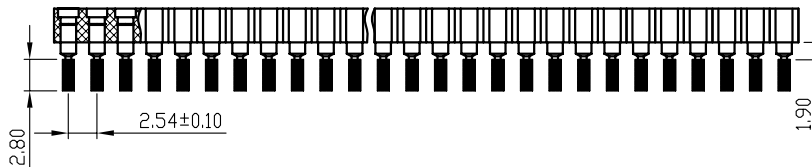


Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass
 Contact clip(4/6 finger): Beryllium copper(C17200)
 Accepted pin: Ø0.40 to 0.56mm
 Forces: (polished steel gauge Ø0.43mm)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
 Mechanical life: min500 cycles
 Rated current: 3A
 Contact resistance: max 10mΩ
 Dielectric resistance: Min 1000V RMS
 Coplanarity SMD max 0.1 mm(measured on terminations: 25 mm long connectors)

注：此款产品配1.80x7.40加长型圆孔针。
 此款针需退火处理。

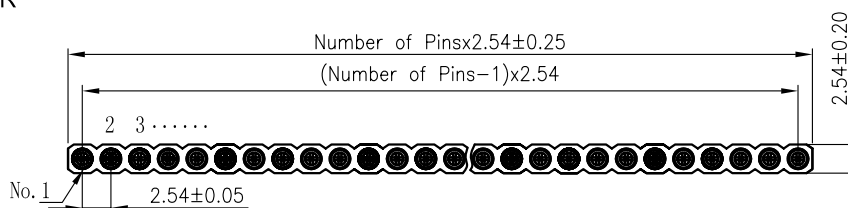

				OPERATION		DRAW	WZG	14.04.01	SCALE	FIT	KLS ELECTRONIC CO., LTD		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	L-KLS1-209A-3.0-1-XX-RM			
				X.XXX	±0.10		SHEET	1/1					
A0	2014.04.01	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	TITLE:	2.54X3.0圆孔母座单排卧贴L=7.4加长针		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL							