

## SPECIFICATION FOR APPROVAL

**Customer:** \_\_\_\_\_  
**Product Material No. :** \_\_\_\_\_  
**Model No.** \_\_\_\_\_ **LF-GIR060YS** \_\_\_\_\_  
**Version :** \_\_\_\_\_ **V3.1** \_\_\_\_\_  
**Manufacturer:** \_\_\_\_\_ **Sichuan Ledfriend Technology Co., Ltd** \_\_\_\_\_

### Customer Approval

Tested by	Checked by	Approved by

### Ledfriend Approval

Tested by	Checked by	Approved by

### The full model numbers required by customers

Full model No.		Full model No.	
Full model No.		Full model No.	

### E.C. List

Version	Description of change	Engineer	Date
3.0	original release	Zhu Yandong	2015-11-6
3.1	ENEC added	Zhu Yandong	2016-6-2

Shenzhen Ledfriend Optoelectronics Co., Ltd.  
 4&5/F, Bldg 14A, Taihua Wutong Island, Gushu Development Zone, Xixiang Street, Bao'an District,  
 Shenzhen, China 518126  
 www.lifud.com, China service hotline: 400-096-6815 (China technical support: 13410244507)

<b>Model</b>	LF-GIR060YS	<b>Series</b>	flicker-free AC220-240V plastic case
--------------	-------------	---------------	--------------------------------------

## 1. Product description



Isolated LED driver suitable for class II LED luminaires.

Category: flicker-free AC220-240V plastic case series.

Product properties: passive PFC, high PF, high efficiency, low THD and flicker-free.

Application: commercial, residential and decorative lighting.

Warranty: 5 years (please refer to the warranty condition).

### Certifications:



## 2. Technical data (1)

	Full model number	LF-GIR060YS1400H	LF-GIR60YS1500H	LF-GIR060YS1550H
<b>Output</b>	Output voltage	27-42 VDC	27-42 VDC	27-42 VDC
	Output current	1400mA	1500mA	1550mA
	Ripple voltage	<1V		
	Current tolerance	±5%		
	Time to light	230Vac <0.5S		
	Temperature drift	±10%		
	Output Line regulation	±5%		
<b>Input</b>	Input Line regulation	±5%		
	Rated input voltage	220-240 Vac (Max input voltage: 198-264Vac)		
	Frequency	47Hz-63Hz		
	Input current	0.5A Max		
	Power factor	≥0.90/230Vac	≥0.90/230Vac	≥0.90/230Vac
	THD	≤20%		
	Efficiency	≥90%/230Vac	≥90%/230Vac	≥90%/230Vac
	In-rush current (peak /duration)	I<60A/350uS@230Vac		
	Typ. power input on stand-by	Pin<1W		
<b>Protective features</b>	No-load	Max. output voltage (no-load voltage) 55V		
	Short-circuit	Hiccup mode (auto-recovery)		
<b>Environment condition</b>	Working temperature	-30°C - +50°C		
	Working humidity	20-90%RH (no condensation)		
	Storage temperature/humidity	-40°C ~ +80°C (6 months under the class I environment); 10-90%RH (no condensation)		
	Atmospheric pressure	86-106KPa		
<b>Safety and norms</b>	Certifications	ENEC, TUV_GS, CE, CB, RCM, SAA, CCC		
	Hi-pot test	I/P-O/P: 3.75KVac, <5mA, 60S		
	Insulation resistance	I/P-O/P: 500VDC, >100MΩ		
	Surge level	Comply with IEC61000-4-5(L/N: 1KV)		
	EMI	Comply with EN55015, EN61000-3-2.		
	EMS	Comply with EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547.		
<b>Others</b>	Packing (weight)	Net weight: 220g±5%/pc; 40pcs/carton; 9.5KG±5%/carton. Carton size: 39 x 29 x 21 cm (L x W x H).		
	IP level	IP20		
	Warranty condition	5 years (Max. case temperature must not exceed 75°C).		
<b>Testing equipment</b>	AC power source: CHROMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: TH9201B, flicker-free tester (flicker-free coefficient tester) 60N-01, etc.			
<b>Test conditions</b>	The parameters above including the power factor, THD, efficiency are all tested under the ambient temperature 25°C and humidity 50%, AC input 230V and 90% output load.			
<b>Additional Remark</b>	1. In the power supply circuit, it is recommended that the customer should install an over-under-voltage protection and surge protection device to ensure the safety of using electricity. 2. The PC cover, shell, end caps used together with the LED driver inside the LED lamp must meet the UL94V-0 fire rating level or above.			

<b>Model</b>	LF-GIR060YS	<b>Series</b>	flicker-free AC220-240V plastic case
--------------	-------------	---------------	--------------------------------------

3. As a part of the LED lamp, the LED driver is not the only factor determining the EMC performance of the LED lamp. And the EMC performance is also related to the LED lamp's structure and the wire routing. Thus we strongly recommend the manufacturer of the finished LED lamp must re-confirm the EMC of the LED lamps.


**Technical data (2)**

	Full model number	LF-GIR060YS0950H	LF-GIR060YS1000H	LF-GIR060YS1100H
<b>Output</b>	Output voltage	40-55 VDC	40-55 VDC	40-55 VDC
	Output current	950mA	1000mA	1100mA
	Ripple voltage	<1V		
	Current tolerance	±5%		
	Time to light	230Vac <0.5S		
	Temperature drift	±10%		
	Output Line regulation	±5%		
<b>Input</b>	Input Line regulation	±5%		
	Rated input voltage	220-240 Vac (Max input voltage: 198-264Vac)		
	Frequency	47Hz-63Hz		
	Input current	0.3A Max		
	Power factor	≥0.90/230Vac	≥0.90/230Vac	≥0.90/230Vac
	THD	≤20%		
	Efficiency	≥90%/230Vac	≥90%/230Vac	≥90%/230Vac
	In-rush current (peak /duration)	I<60A/350uS@230Vac		
Typ. power input on stand-by	Pin<1W			
<b>Protective features</b>	No-load	Max. output voltage (no-load voltage) 70V		
	Short-circuit	Hiccup mode (auto-recovery)		
<b>Environment condition</b>	Working temperature	-30°C - +50°C		
	Working humidity	20-90%RH (no condensation)		
	Storage temperature/humidity	-40°C ~ +80°C (6 months under the class I environment); 10-90%RH (no condensation)		
	Atmospheric pressure	86-106KPa		
<b>Safety and norms</b>	Certifications	ENEC, TUV_GS, CE, CB, RCM, SAA, CCC		
	Hi-pot test	I/P-O/P: 3.75KVac, <5mA, 60S		
	Insulation resistance	I/P-O/P: 500VDC, >100MΩ		
	Surge level	Comply with IEC61000-4-5(L/N: 1KV)		
	EMI	Comply with EN55015 , EN61000-3-2.		
	EMS	Comply with EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547.		
<b>Others</b>	Packing (weight)	Net weight: 220g±5%/pc; 40pcs/carton; 9.5KG±5%/carton. Carton size: 39 x 29 x 21 cm (L xWxH).		
	IP level	IP20		
	Warranty condition	5 years (Max. case temperature must not exceed 75°C).		
<b>Testing equipment</b>	AC power source: CHROMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: TH9201B, flicker-free tester (flicker-free coefficient tester) 60N-01, etc.			
<b>Test conditions</b>	The parameters above including the power factor, THD, efficiency are all tested under the ambient temperature 25°C and humidity 50%, AC input 230V and 90% output load.			
<b>Additional Remark</b>	1. In the power supply circuit, it is recommended that the customer should install an over-under-voltage protection and surge protection device to ensure the safety of using electricity. 2. The PC cover, shell, end caps used together with the LED driver inside the LED lamp must meet the UL94V-0 fire rating level or above. 3. As a part of the LED lamp, the LED driver is not the only factor determining the EMC performance of the LED lamp. And the EMC performance is also related to the LED lamp's structure and the wire routing. Thus we strongly recommend the manufacturer of the finished LED lamp must re-confirm the EMC of the LED lamps.			


<b>Model</b>	LF-GIR060YS	<b>Series</b>	flicker-free AC220-240V plastic case
--------------	-------------	---------------	--------------------------------------

### 3. Product Referenced Lifetime Curve


The curve below illustrates the driver's lifetime data when the LED driver's Max. case temperature reaches 40°C, 50°C, 60°C, 70°C and 80°C.

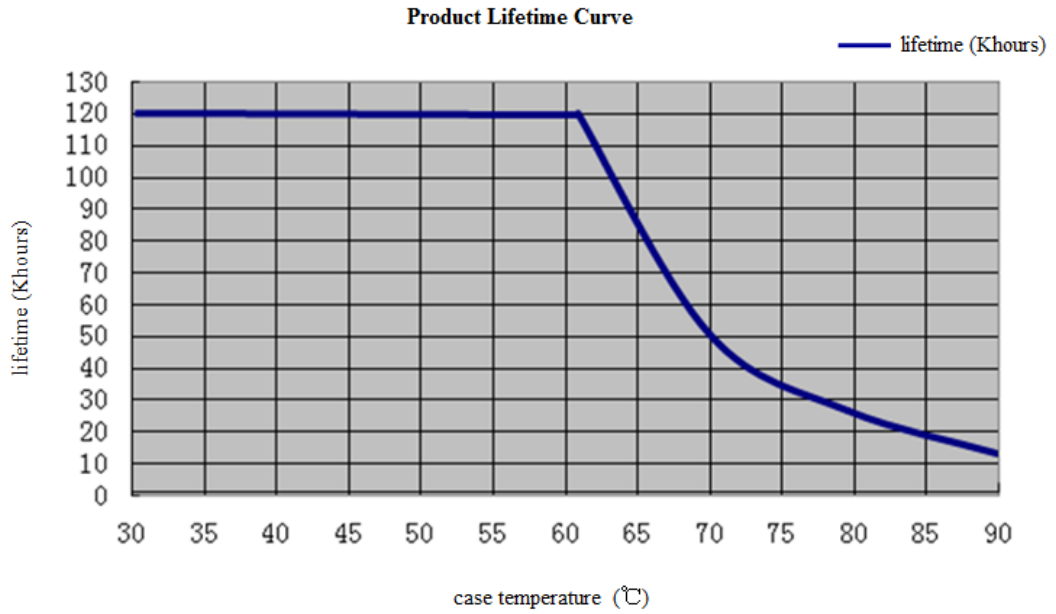

### 4. Dimensional Drawing (unit: mm)

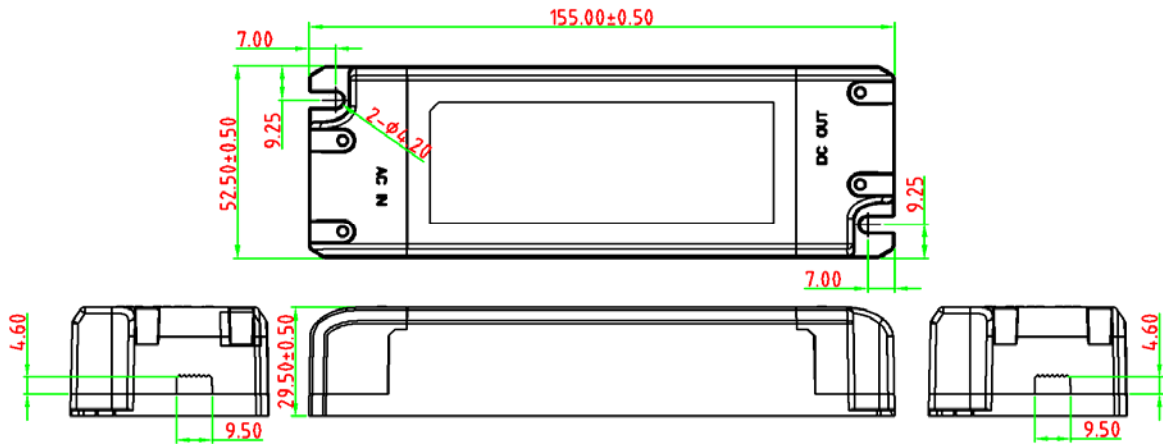

### 5. Wire Connection Diagram:

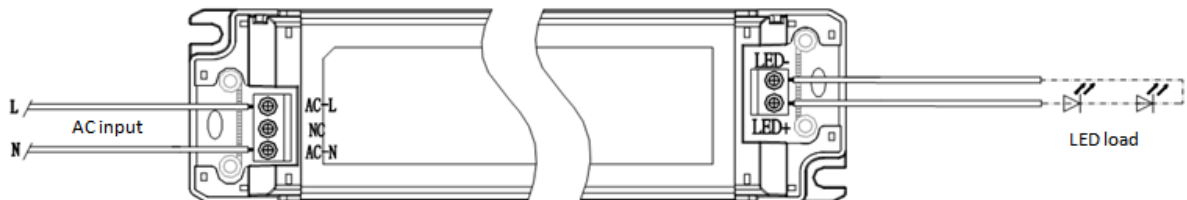

<b>Model</b>	LF-GIR060YS	<b>Series</b>	flicker-free AC220-240V plastic case
--------------	-------------	---------------	--------------------------------------