



## PRODUCT SPECIFICATION

### Model No.: FYL-5463NURD1E-L3.2

Descriptions:
■ Dice material: AlGaInP.
■ Emitting Color: Super bright Red.
■ Device Outline: $\Phi 5 \times 4$ mm ellipse type.
■ Lens Type: Red diffused.



CUSTOMER APPROVED SIGNATURES	APPROVED BY	SALES BY	PREPARED BY
			

**NINGBO FORYARD OPTOELECTRONICS CO.,LTD.**

**Add:** NO.115 Qixin Road Ningbo Zhejiang China

**Zip:** 315051

**Tel:** 0086-574-87933652 87927870 87922206

**Fax:** 0086-574-87927917


**E-mail:** Sales@foryard.com (General)

[Http://www.foryard.com](http://www.foryard.com)

## ■ Features

1. Low power consumption.
2. High efficiency.
3. General purpose leads.
4. High intensity.
5. RoHs compliant.

## ■ Package configuration

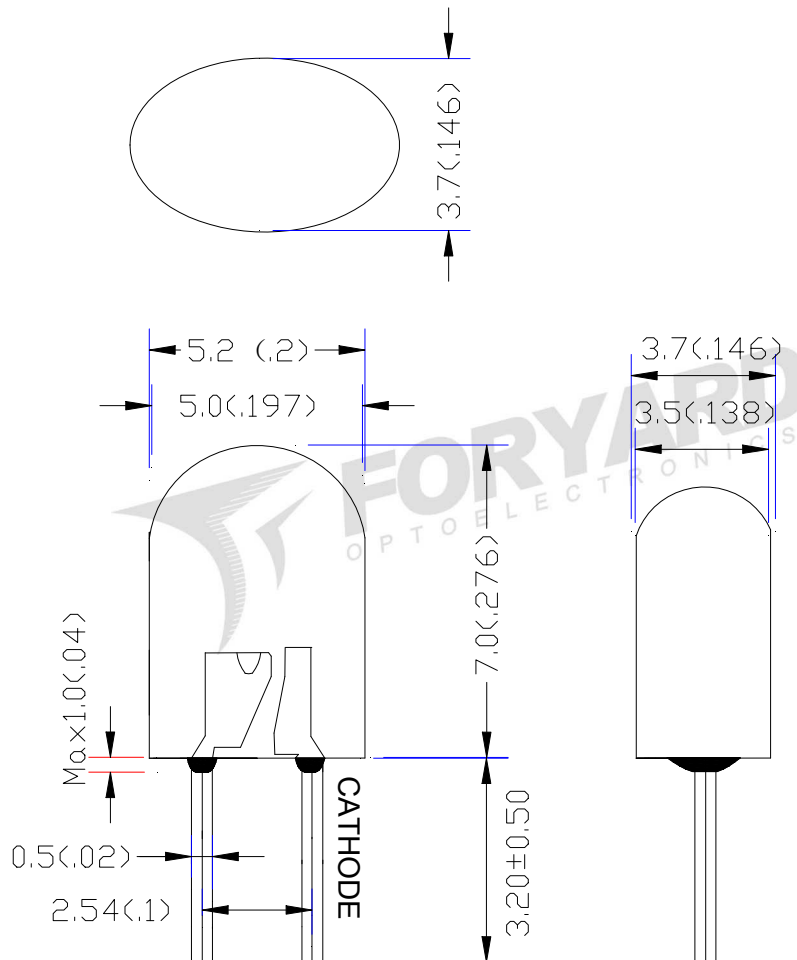

### Notes:

1. All dimensions are millimeters (inches)
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

■ Absolute maximum ratings( $T_a=25\text{ }^{\circ}\text{C}$ )






Parameter	MAX.	Unit
Power Dissipation	75	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From $50\text{ }^{\circ}\text{C}$	0.4	mA/ $^{\circ}\text{C}$
Reverse Voltage	5	V
Operating Temperature Range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$	
Storage Temperature Range	$-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$	
Lead Soldering Temperature[4mm(.157") From Body]	260 $^{\circ}\text{C}$ for 5 Seconds	

■ Electrical and optical characteristics( $T_a=25\text{ }^{\circ}\text{C}$ )


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	1800	3000	–	mcd	$I_f=20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	X	80	–	Deg	
		Y	35			
Peak Emission Wavelength	$\lambda_p$	–	630	–	nm	
Dominant Wavelength	$\lambda_d$	618	624	627	nm	
Spectral Line Half-Width	$\Delta\lambda$	–	15	–	nm	
Forward Voltage	$V_F$	1.9	2.1	2.3	V	
Reverse Current	$I_R$			10	$\mu\text{A}$	

■ **Typical Electrical Characteristics Curves**





(25 °c Ambient Temperature Unless Otherwise Noted)

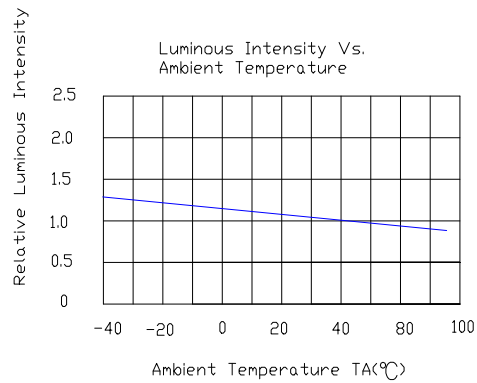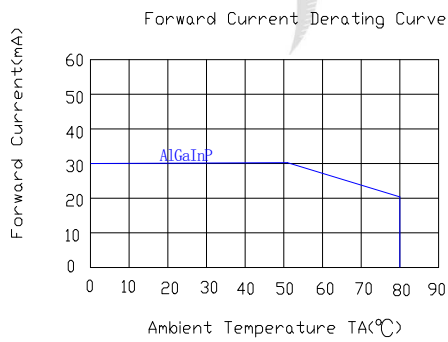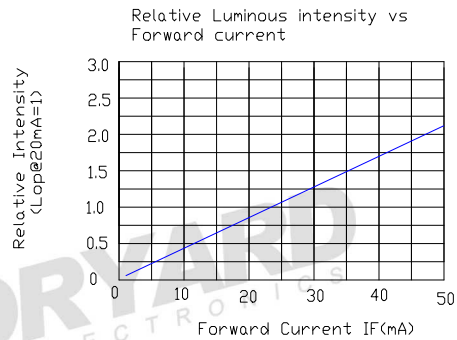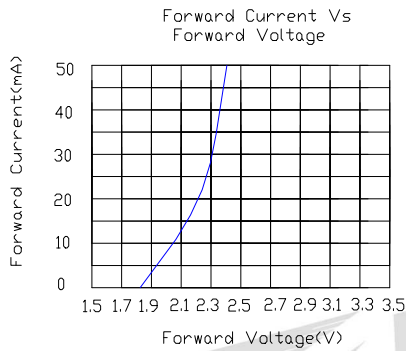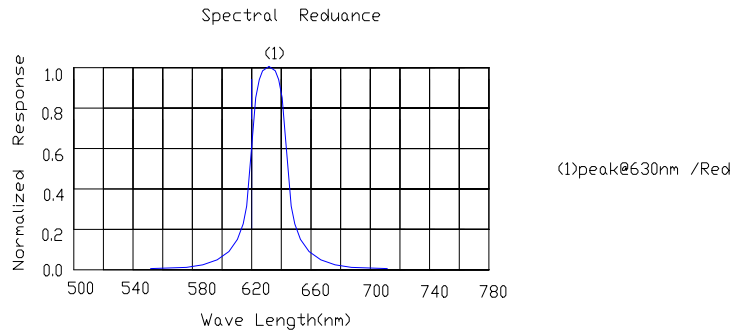



**Radiation pattern.**

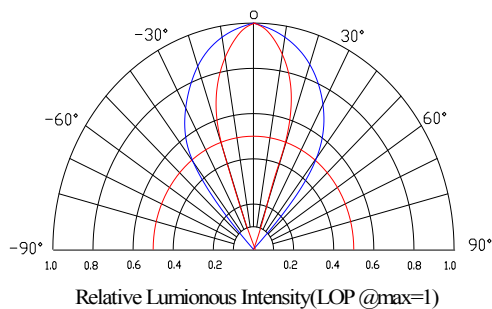

■ LAMP PACKING.



5mm 1000PCS/Polybag

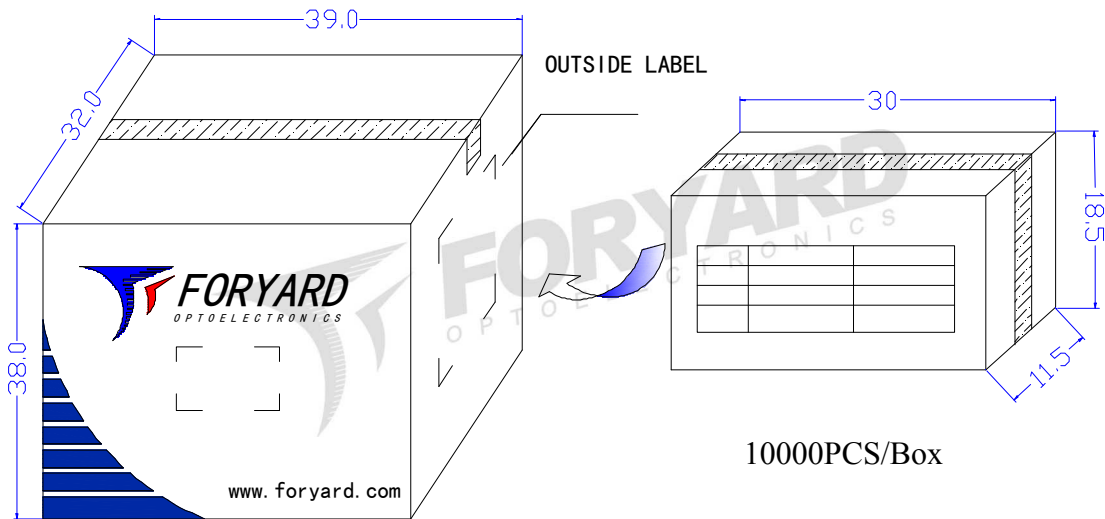

60000PCS/Carton



OUTSIDE LABEL