

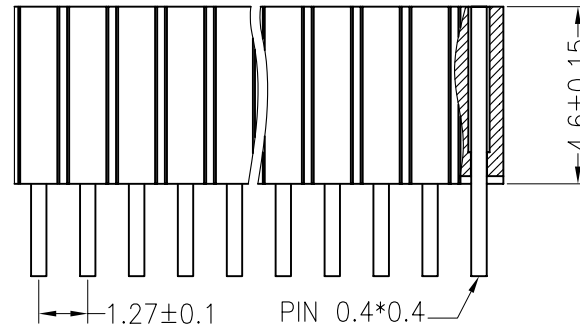
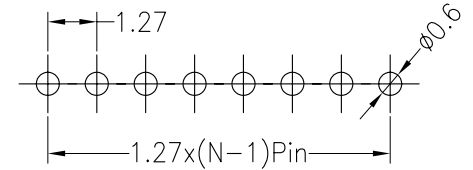


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

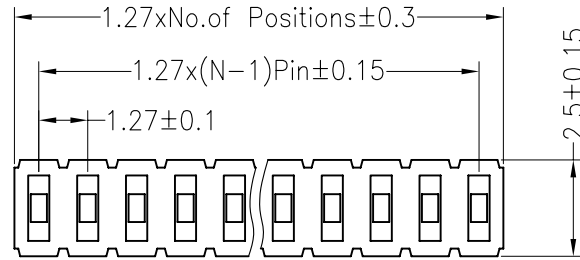

Dimension antitheses list		
ITEM	PC	
Standard	2.40	3.00
Alternate		

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	KLS ELECTRONIC CO., LTD				
				X.X	±0.30				UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.				L-KLS1-208C-4.6-1-11-S-PC3.0	
A0	2012.04.18	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	TITLE:				1.27PF 1xNPin H4.6mm 180°	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE		PROJ.	◆						
				DIM	TOL										