


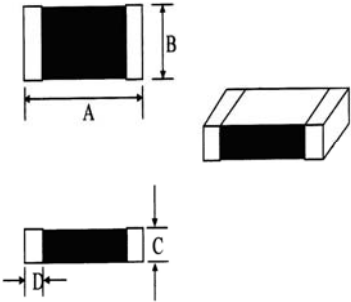





SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:			
PART NO: LCB1608-181Y-N				DWG.NO: TE9804111			
CUSTOMER PART NO:				CUST.DWG.NO:			
<p>(1) DIMENSIONS (UNIT: mm)</p> 				A	1.6 ± 0.2	m/m	
				B	0.8 ± 0.2	m/m	
				C	0.8 ± 0.2	m/m	
				D	0.3 ± 0.2	m/m	
				E		m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
(2) ELECTRICAL REQUIREMENTS							
Z (Ω)	$180 \pm 25\%$	TEST FREQ	100MHz/100mV				
RDC (Ω)	0.15 (MAX)	TEST FREQ					
IDC (mA)	2000 (MAX)	TEST FREQ					
TEST INSTRUMENTS HP4338A MILLIOHMMETER HP4291B RF IMPEDANCE/MATERIAL ANALYZER				APPROVED BY 			
				CHECKED BY 			
				DRAWN BY 			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO: LCB1608-181Y-N				DWG.NO: TE9804111					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)	DIMENSION (UNIT : mm)					
				A	B	C	D		
FREQ	100MHz /100mV								
SPEC	180 ± 25%	0.15 (MAX)	2000 (MAX)	1.6 ± 0.2	0.8 ± 0.2	0.8 ± 0.2	0.3 ± 0.2		
1	164.5	0.077	OK	1.62	0.82	0.83	0.31		
2	155.5	0.079	OK	1.60	0.81	0.81	0.29		
3	166.6	0.076	OK	1.59	0.80	0.82	0.32		
4	150.8	0.072	OK	1.62	0.82	0.82	0.31		
5	156.9	0.074	OK	1.61	0.82	0.83	0.30		
6	149.4	0.075	OK	1.63	0.80	0.81	0.32		
7	161.2	0.074	OK	1.62	0.80	0.82	0.30		
8	157.7	0.076	OK	1.61	0.81	0.82	0.33		
9	157.5	0.074	OK	1.63	0.81	0.83	0.30		
10	165.6	0.077	OK	1.60	0.83	0.81	0.28		
X	158.57	0.08		1.61	0.81	0.82	0.31		
R	17.2	0.01		0.04	0.03	0.02	0.05		
						APPROVED BY			
									
						CHECKED BY			
									
						DRAWN BY			
									

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

LCB1608-181Y-N

