

FD 1751 series

172x150x51 mm

Features

- Aluminum frame
- UL 94V-0 thermoplastic impeller
- Ball bearing
- Lead wires
- Polarity protection*
- Optional functions: FG, RD, PWM
- Operating temp.: -10~+70 °C
- Storage temp.: -40~+70 °C
- 720 g




Model	Voltage VDC	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (mmH2O)	Sound level dBA
FD 1751 12 B 30	12	1.16	13.92	3000	232.20	12.88	52.3
FD 1751 12 B 35		1.76	21.12	3500	269.65	17.38	56.6
FD 1751 12 B 40		2.42	29.04	4000	307.11	22.54	60.5
FD 1751 24 B 30	24	0.58	13.92	3000	232.20	12.88	52.3
FD 1751 24 B 35		0.88	21.12	3500	269.62	17.38	56.6
FD 1751 24 B 40		1.21	29.04	4000	307.11	22.54	60.5
FD 1751 24 B 45		1.86	44.64	4500	344.56	28.37	62.3
FD 1751 24 B 50	48	2.20	52.80	5000	382.01	34.88	66.8
FD 1751 48 B 30		0.29	13.92	3000	232.20	12.88	52.3
FD 1751 48 B 35		0.44	21.12	3500	269.65	17.38	56.6
FD 1751 48 B 40		0.60	28.80	4000	307.11	22.54	60.5
FD 1751 48 B 45		0.93	44.64	4500	344.56	28.37	62.3
FD 1751 48 B 50		1.10	52.80	5000	382.01	34.88	66.8

*: Circuit won't be burned within 5seconds when Vcc & GND are exchanged


** : above specifications are subject to change without prior notice

***: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

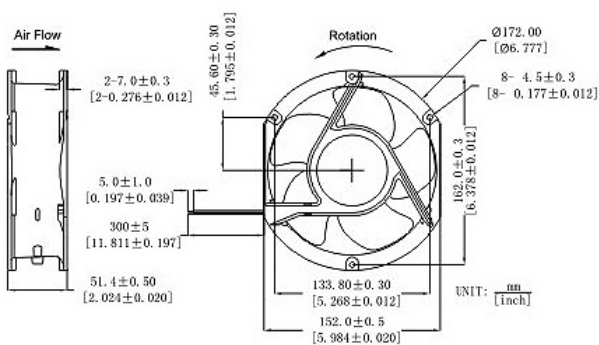

Performance

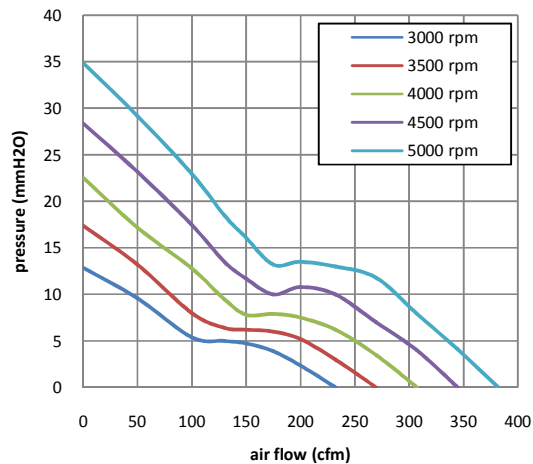

Ordering Code:

Fan type DC fans	Dimensions	Voltage	Bearing type		Speed	optional			Electrical connections		Other specs*	
			Ball	sleeve		FG	RD	PWM	Terminals	Lead wires		
FD	1751	12/24/48	B	-	30/35/40/45/50	T	D	P	-	-	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 1751 24 B 30P-L