

TERMINAL BLOCK Connector

Pluggable Series

KLS2-EDKA-5.00/5.08 Series Pitch=5.00mm/5.08mm

Electrical :


Rated voltage: 300V
Rated current: 15A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: AC1500V/1Min

Material

Housing: Pa66, UL94V-0
Screws: M2.5, steel, Zinc plated
Contact : Phosphor Bronze

Mechanical

Temp. Range: -40°C~+105°C
MAX Soldering: +250°C for 5 Sec
Wire range: 28-12AWG 2.5mm²
Torque: 0.4Nm (3.6Lb. in)
Strip length: 7-8 mm

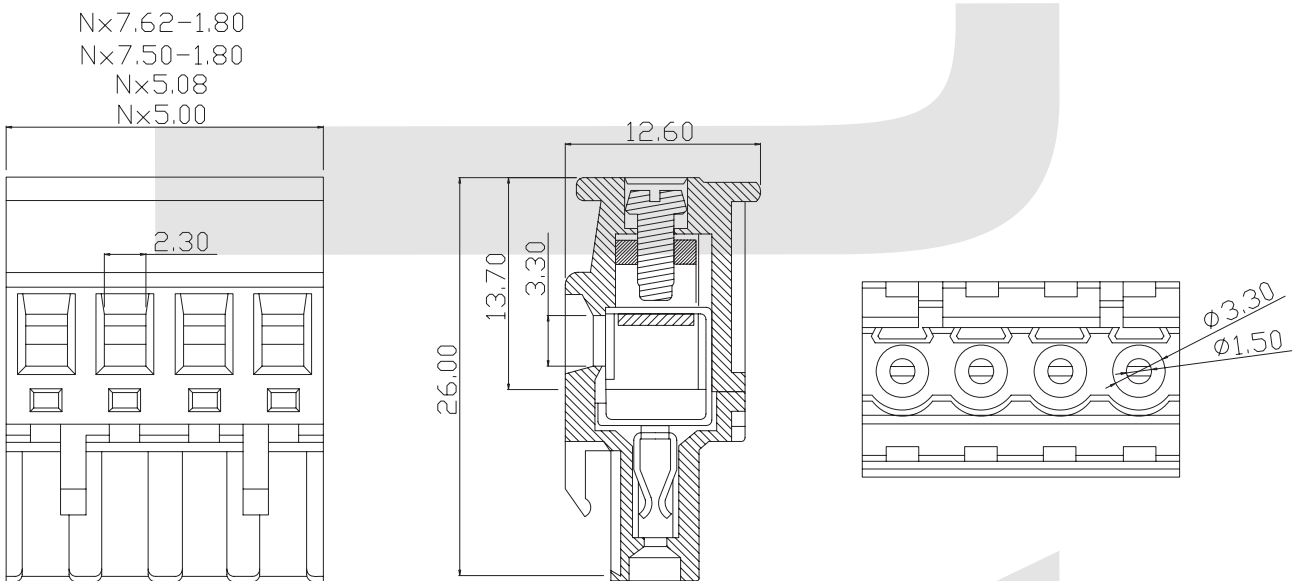

ORDER INFORMATION

Product NO.: KLS2-EDKA-5.00-XXP X X X

Pos. NO.	Series No.	Pitch: 5.00=5.00mm 7.50=7.50mm 5.08=5.08mm 7.62=7.62mm	Number of Pole	Customer Request	Screw: C=Cross Screw S=Slot Screw	Color: 1=Gray 4=Green 7=Transparent	2=Blue 5=Orange 8=Yellow	3=Black 6=Red 9=White
----------	------------	-----------------------------------------------------------------	----------------	------------------	--------------------------------------	-------------------------------------------	--------------------------------	-----------------------------