



Optics
Shinland

Each Ray is brighter in Shinland

SL-075I

Matched LED Source

Details

Material:	PC
LENS Material:	PC
Process:	Vacuum Aluminum Plating
MAX Diameter:	75.0mm
Height:	41mm
Matched Holder:	SL-HD-B
Matched Cover:	SL-075-CLEAR-LENS/SL-075-MIXING-LENS SL-075-WOF-LENS-B/SL-075-FSQ-LENS-B SL-075-M-LENS-B/SL-075-F-LENS-B SL-075-WW-LENS-B/SL-075-MOF-LENS-B
ROSH Compliant:	YES
Status:	Ready

Optical Properties

Code	Typ. Angle	Typ. efficiency
SL-075I-S	10°-21°	90%
SL-075I-M	25°-27°	91%
SL-075I-L	38°-41°	91%



Photo



CLL02x	MINI
CLL03x	MEGA
CLU700	
CLU710	G4-10
CLU720	G4-17
CLU730	
CLC020	105 1202/1203
CXM-6	1204/1205
CXM-7	1208
CXM-9	
CXM-14	C1
CXM-18	C4
CHM-6	C5
CHM-9	G16
CHM-11	G17
CHM-14	G18
CDM-6	G19
CDM/CTM-9	G20
CDM/CTM-14	G21
CDM/CTM-18	
	EDC-38C
CXA13	EDC-47C
CXA15	EDC-57C-20
CXA18	EDC-57C-30
CXA25	
CXA1830	NJCxS024Z
E8	NVCxL024Z
E13	NVExJ048Z NTCxS024B
V10	NFCxL036B
V13 Gen6	NFCxL060B
V13 Gen7	NFCxJ108B
V15	NFDxJ130B
V18 Gen6	
V18 Gen7	LC010C
Vero13	LC020C
Vero18	LC006B
Vero13	LC040C
Vero18	LC026B LC033B
Soleriq S9	
Soleriq S10	XTM-9
Soleriq S13	

2 Dimensional Figure


Measure Unit: mm

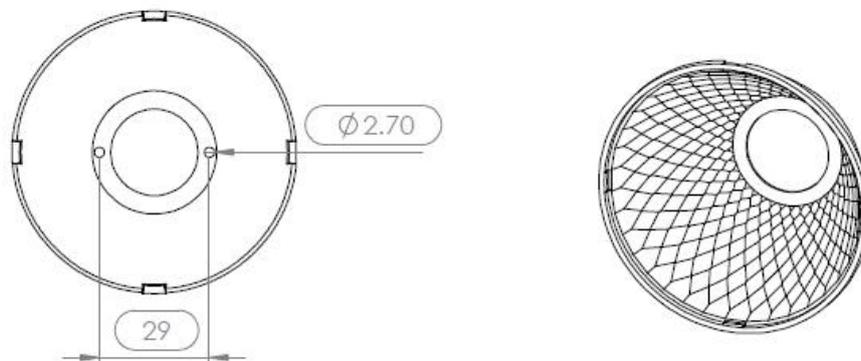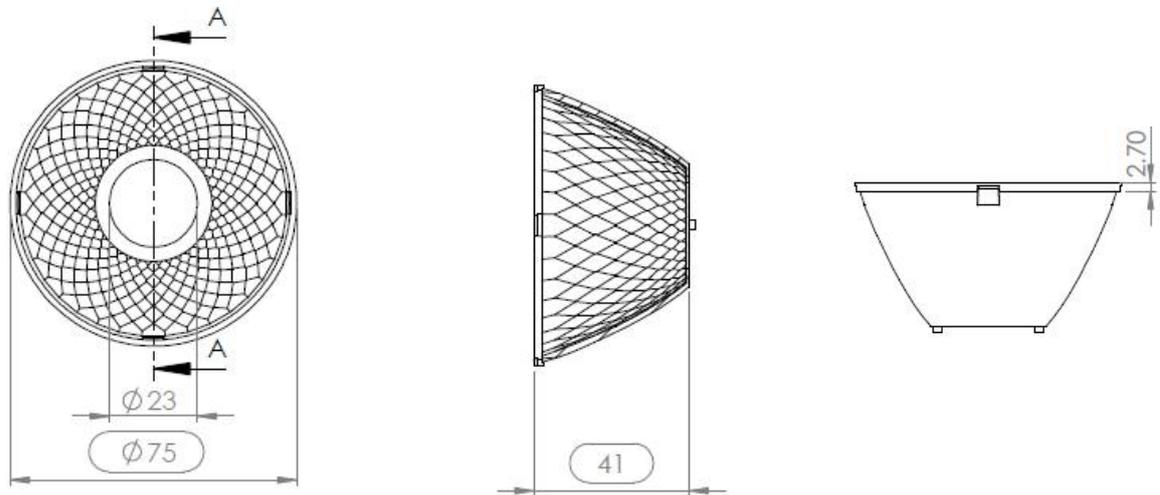

Dimensional Figure

SL-CXA15-HD-B


Measure Unit: mm

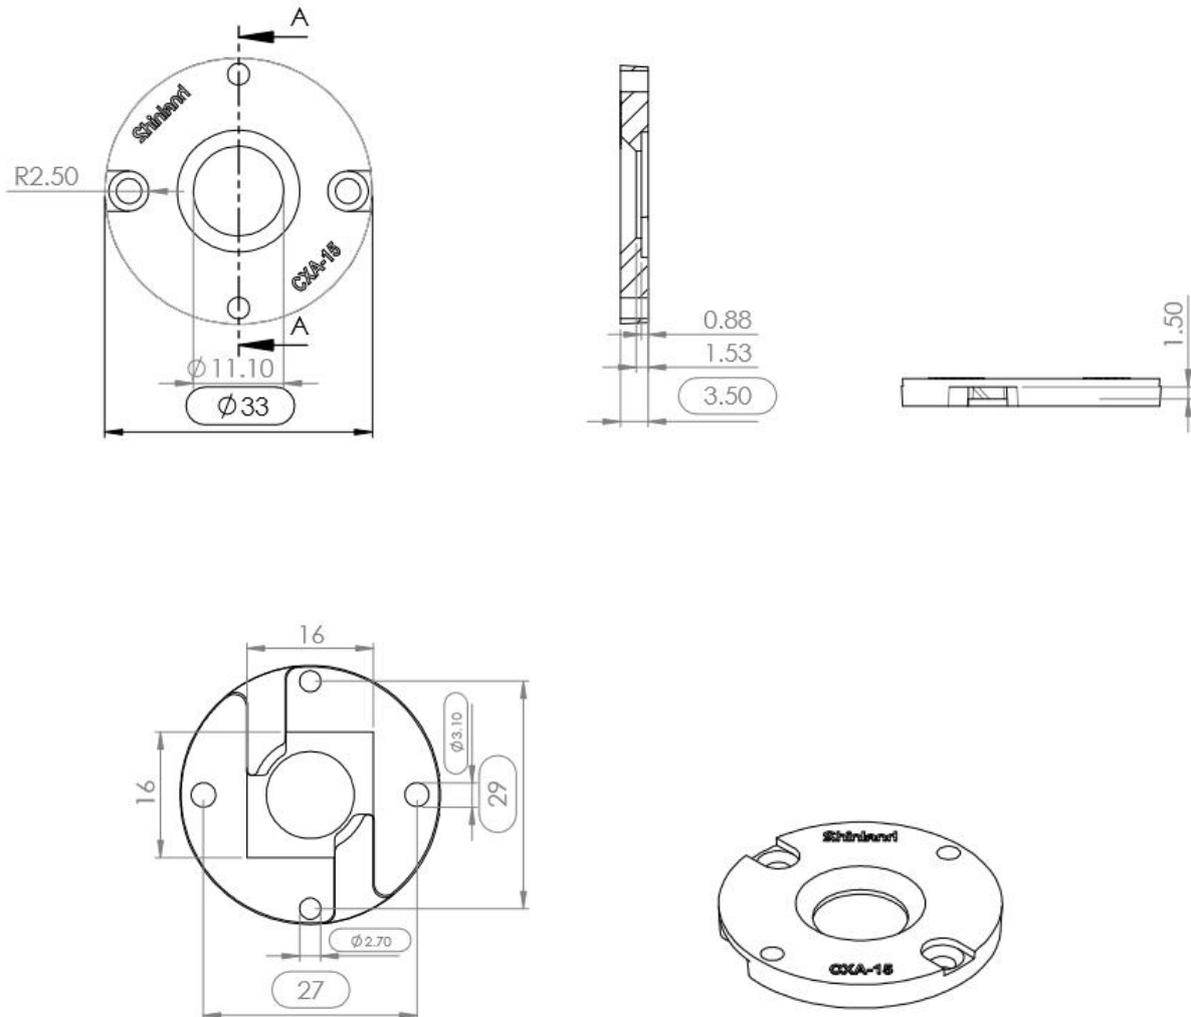

Dimensional Figure

SL-CHM-14-HD-B


Measure Unit: mm

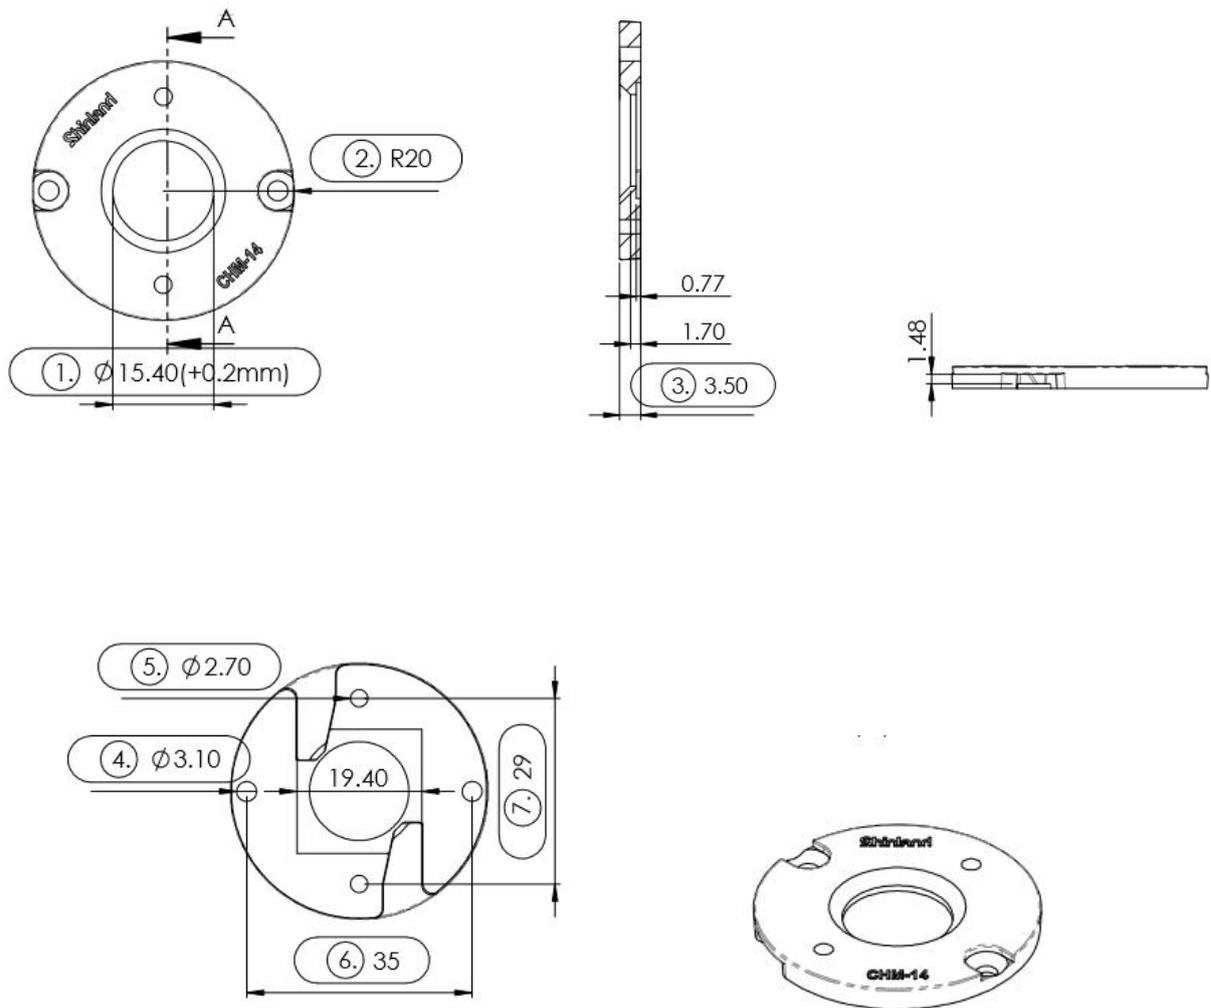

Dimensional Figure



SL-CLL030-HD-B

Measure Unit: mm

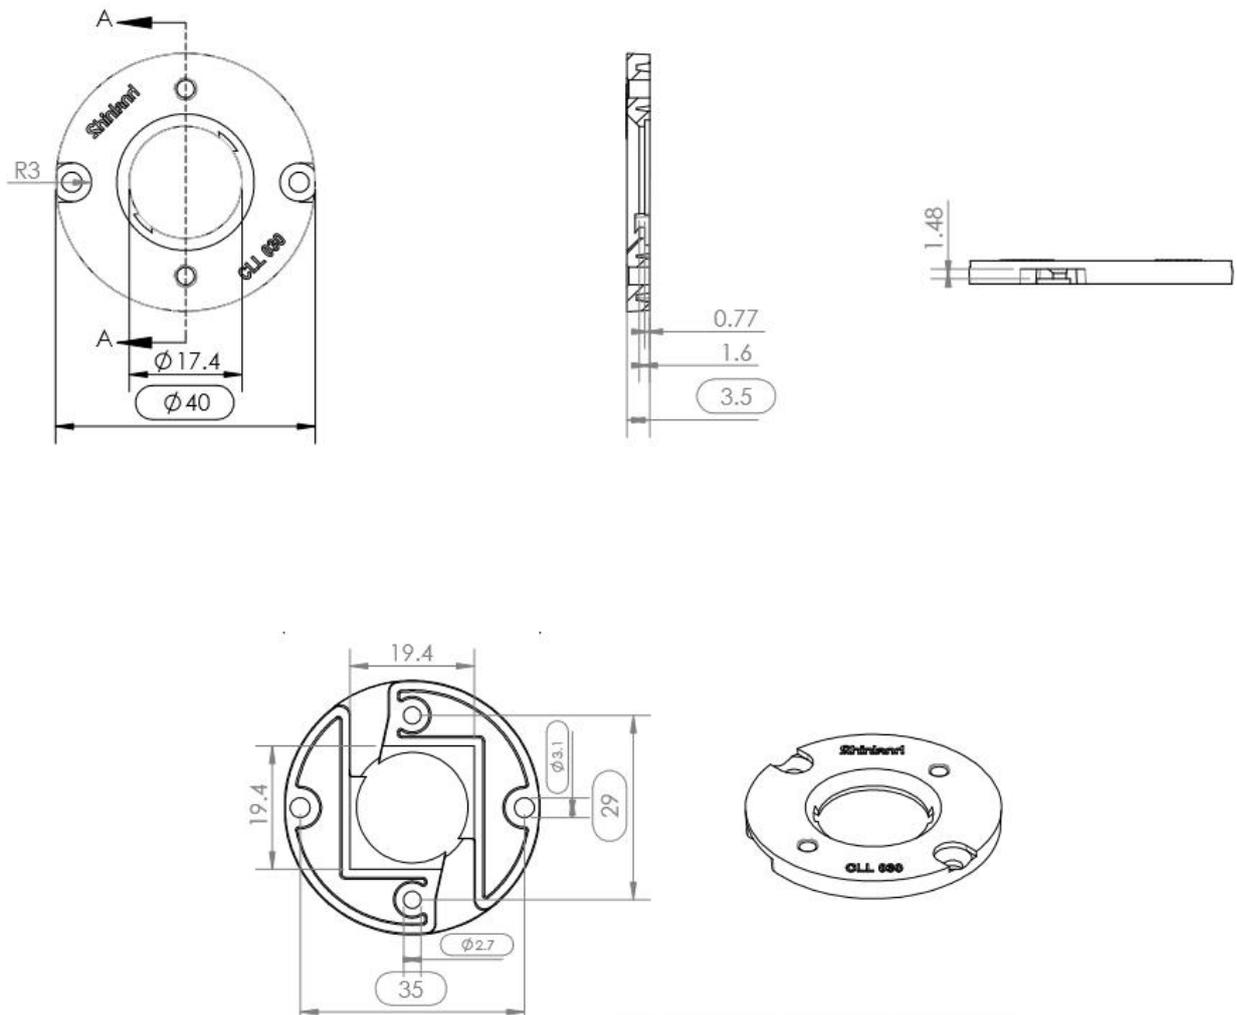



Distribution Curve Flux

SL-075I&SL-CXA15-HD-B:

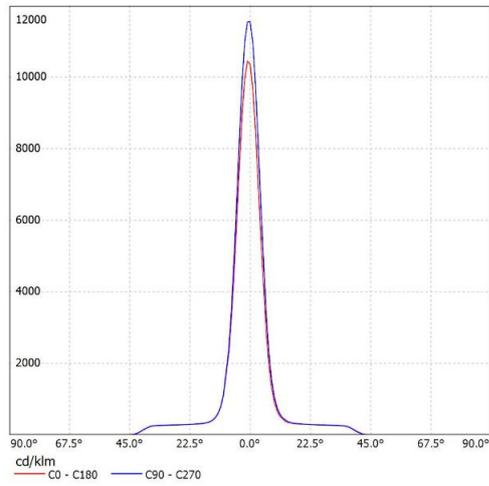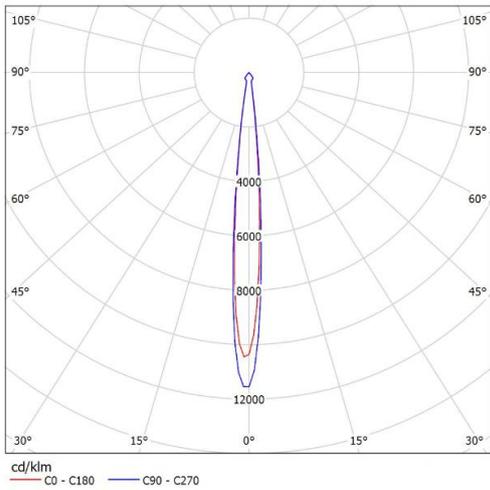



SL-75I-S

K:15.05cd/lm,LED:CXA15XX

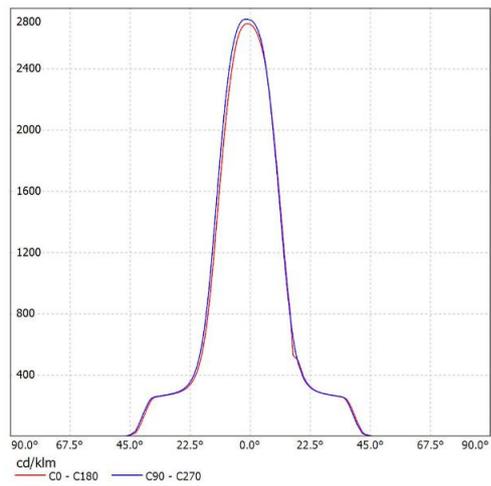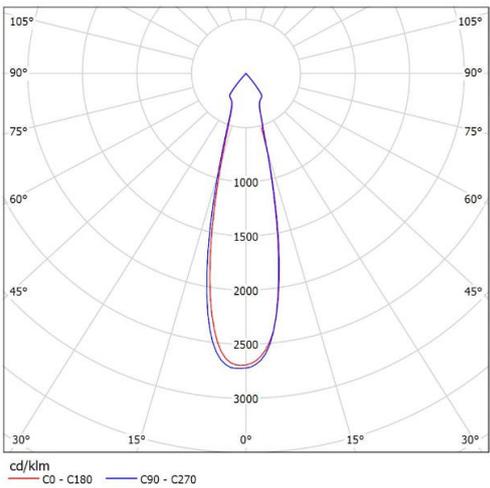

SL-75I-M

K:3.49cd/lm,LED:CXA15XX

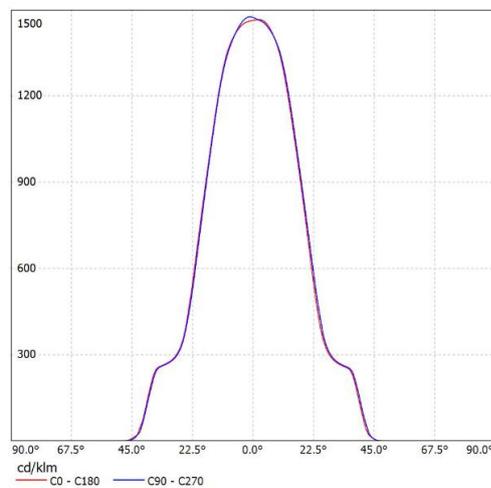
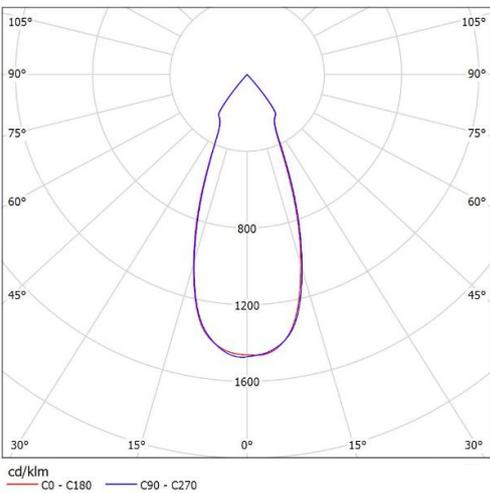


SL-75I-L



K:1.88cd/lm,LED:CXA15XX

Distribution Curve Flux



SL-075I&SL-CHM-14-HD-B:

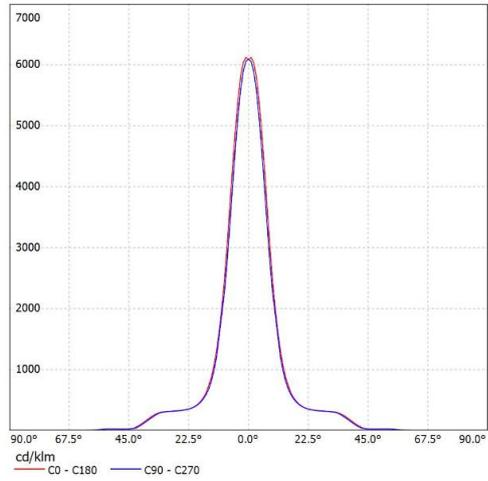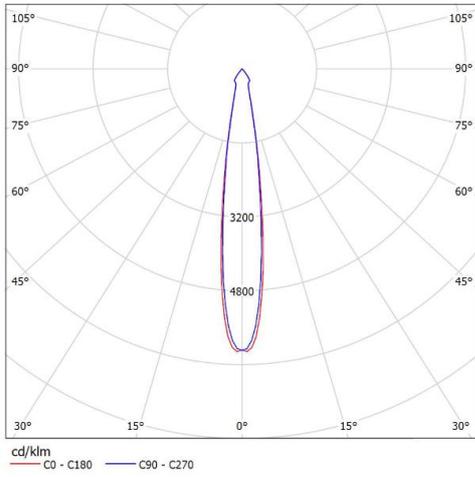

SL-75I-S
K:6.78cd/lm,LED:V13 Gen7

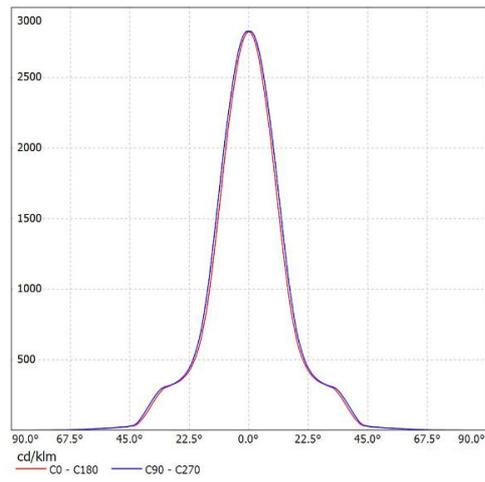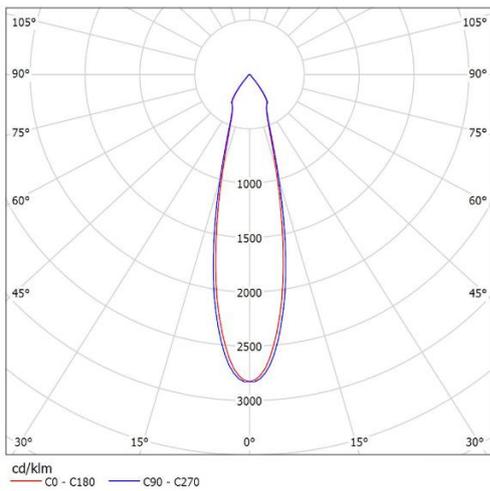



SL-75I-M
K:3.19cd/lm,LED:V13 Gen7

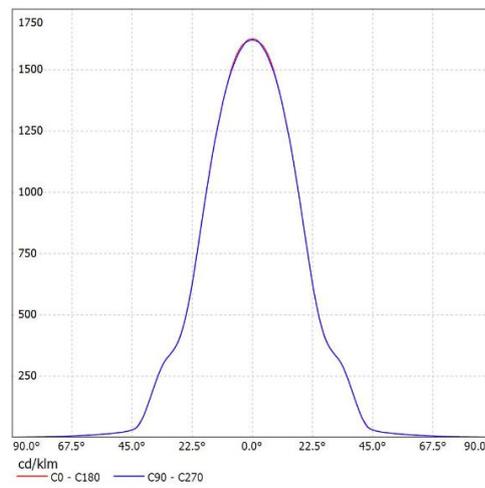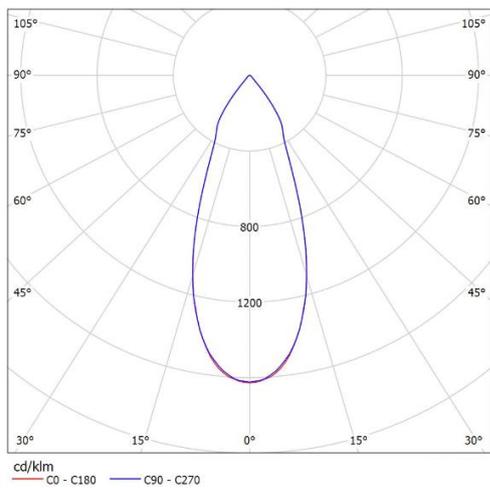



SL-75I-L
K:1.84cd/lm,LED:V13 Gen7

Distribution Curve Flux



SL-075I&SL-CLL030-HD-B:

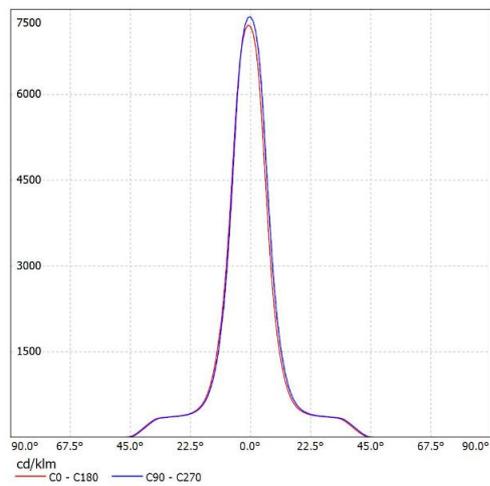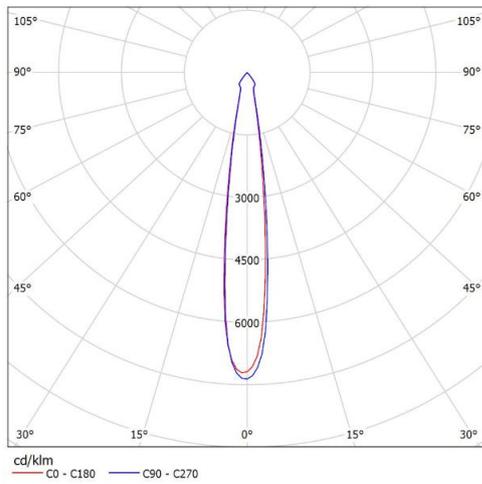

SL-75I-S
K:7.01cd/lm,LED:CLL03X

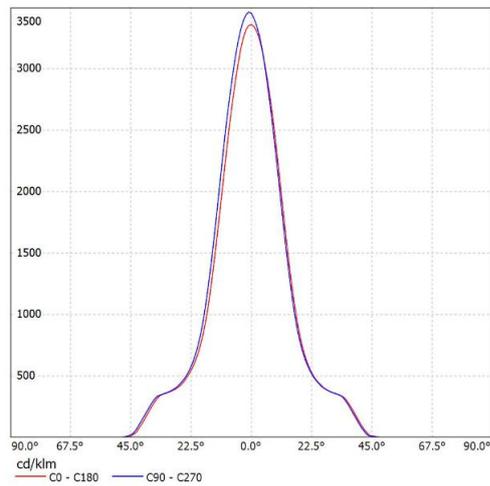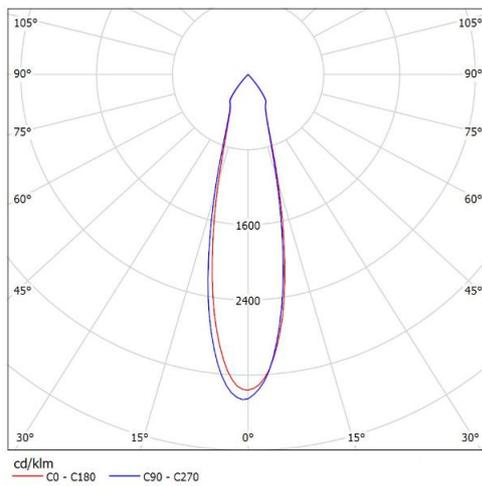

SL-75I-M
K:3.31cd/lm,LED:CLL03X

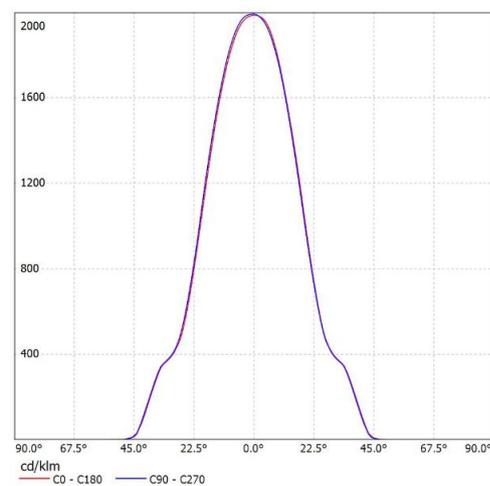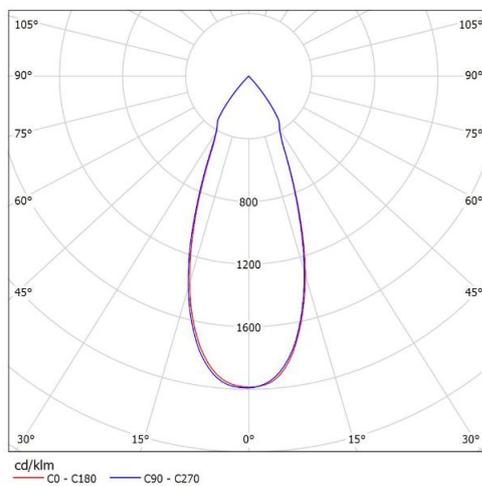

SL-75I-L
K:1.88cd/lm,LED:CLL03X

Package Description

SL-075I

Part NO.	Without pc cover		With pc cover		Box Size(cm)
	Number per Box (pcs)	Box Weigh(kg)	Number per Box (pcs)	Box Weigh(kg)	
SL-075I-S	384	8.08	288	8.18	70X 37X 38
SL-075I-M	384	8.28	288	8.35	70X 37X 38
SL-075I-L	384	8.30	288	8.35	70X 37X 38

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
 - It is forbidden to clean with industrial solvent such as ethanol.
 - Storage temperature: 0°C-40°C, and humidity:30%-95%
 - Keep reflectors in package to void the dust.
 - Prohibit the reflector touch with acid or alkaline solvent
-

About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in reflector field, have years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, mass production and market support are achieved by our exclusive resources.

Insisting on “Quality First, Service First” and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of second-optical solution in China.