

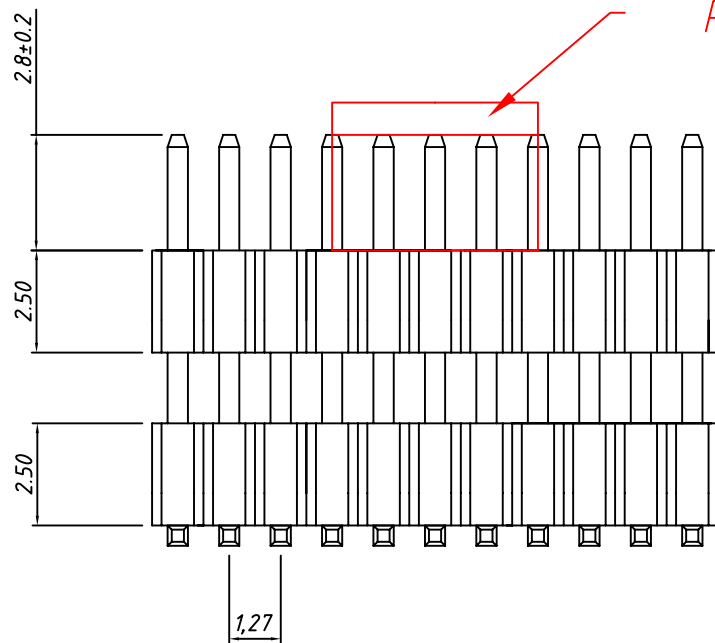
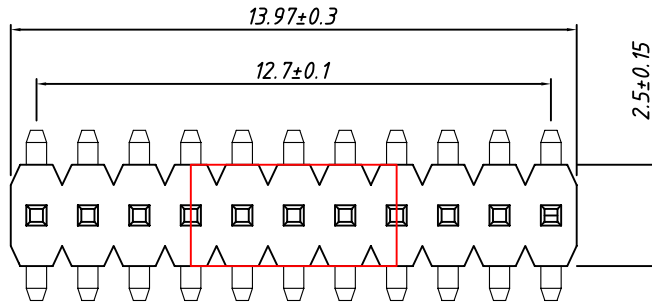


SPECIFICATIONS

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40°to+105°
 Contact Material: Brass
 Insulator Material: Polyester(UL 94V-0)
 Standard: PA6T
 Max.Processing Temp:
 240°C for30-60seconds
 (260°C for10seconds)

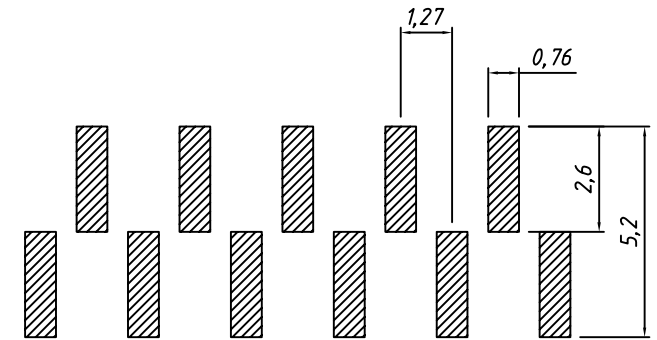

Pick CAP

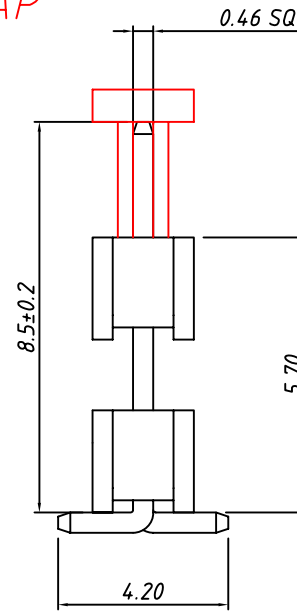

Recommended P.C.B Hole Layout

DRAWN Lee		L-KLS1-218C-2.5-1-11-T2-4.2*2.8*10.6
CHECKED	2017-05-02	
APPROVED	/ /	KLS1-218C-251011T
	SIZE A4	REV A
		KLS ELECTRONIC co.,LTD.

UNIT
mm

x.	±0.3	x.*	±5°
x.x	±0.2	x.x*	±1°
x.xx	±0.1	x.xx*	±0.5°