







SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C f

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

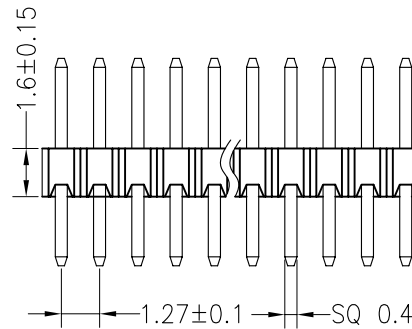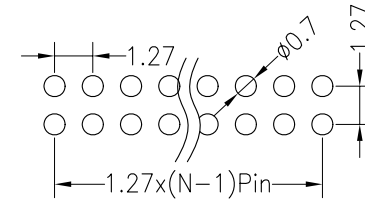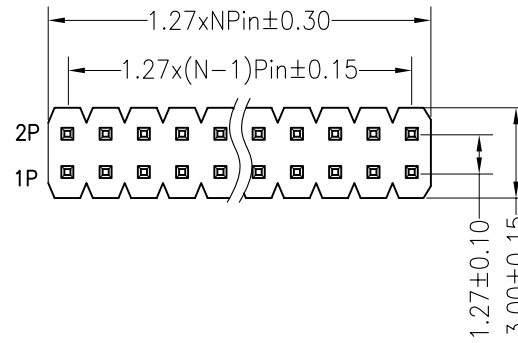

Dimension antitheses list			
ITEM	PA	PC	L
Standard	2.90	2.70	7.20
Alternate			

				OPERATION		DRAW	YiYuSheng	12.04.19	SCALE	FIT	KLS ELECTRONIC CO.,LTD.	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		L-KLS1-207C-1.6-2-10-S2
				X.XXX	±0.10		SHEET	1/1				
A0	2012.04.19	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	TITLE:		1.27PH 2xnPin H1.6 180°
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL						