

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

1. Rated voltage/current : 600V / 10A
2. Withstanding voltage : AC2200V/1Min.
3. Wire range : 28~14AWG

IEC Standard

1.	Pollution Degree	2	2	3
	Overvoltage Category	II	III	III
	Rate Impulse Voltage(KV)	6.0KV	6.0KV	6.0KV
	Rate Voltage(V)	1000V	630V	500V
	Rate Current(A)	10A		

2. Wire range : 0.5~2.5mm²(STR)

NOTES2:





1. Dimension shall be interpreted per ASME Y14.5-2009
2. Poles : 03P
3. Stripping length : 8~9mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					-	∩	∇
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO	150	0.1/10	
6	6 TO 10	10 TO 24	30 TO 30	30 TO 60	60 TO 100	100 TO 150		<	
	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6. RoHS Compliance

DG730K - 1Y - 00A (H)
 (RoHS)
 00A-(Standard)
 (Series No.) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

仅供参考图
 签字: 蓝贵凡
 日期: 2017.11.24

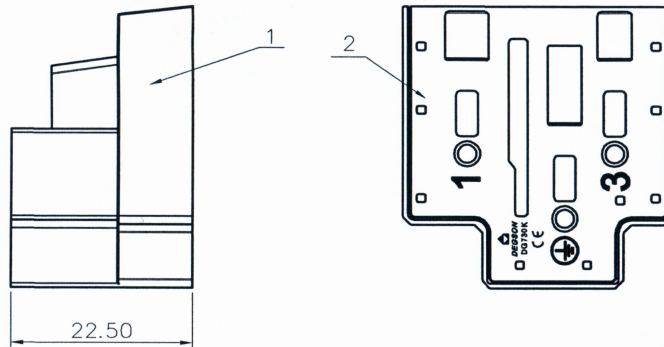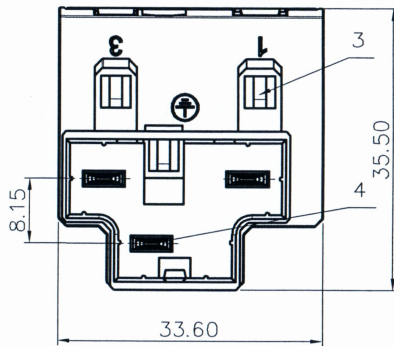

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper alloy	Sn Plated
3	Spring	Stainless steel	
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: /		NAME: DG730K-1Y-00A(H)	
CHKD: /		TITLE: CUSTOMER DRAWING	
DRFT: MEK 08/29/16"		REV	D0-1
		DRAWING NO.: DG730K-C01	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1