
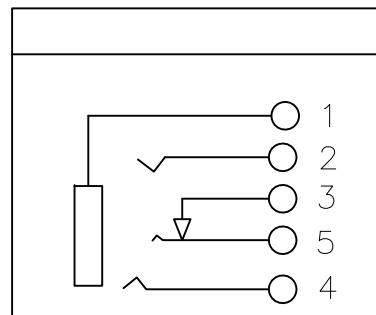
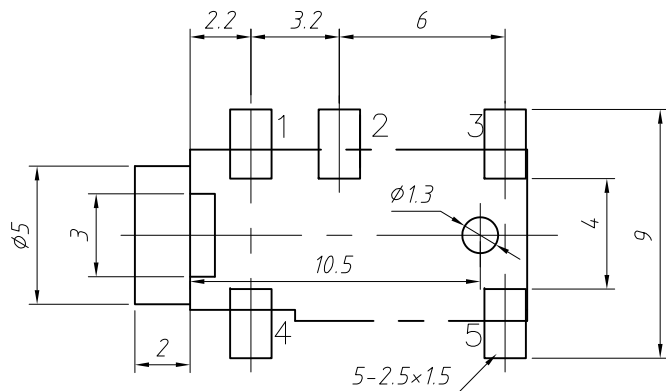
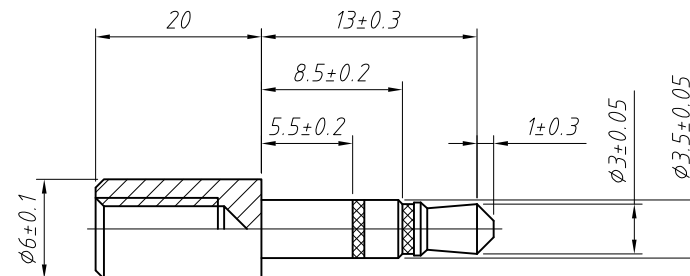
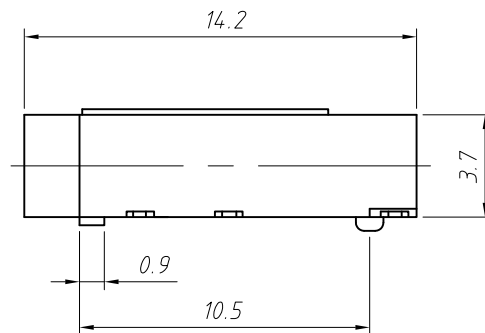


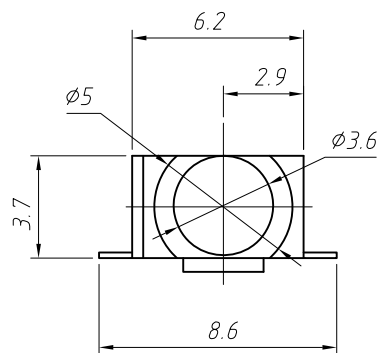

Material:

- 1.1# Pin:0.2 Phosphorous copper,Ag Plating
- 2.2# Pin:0.2 Phosphorous copper,Ag Plating
- 3.3# Pin:0.2 Phosphorous copper,Ag Plating
- 4.4# Pin:0.2 Phosphorous copper,Ag Plating
- 5.5# Pin:0.2 Phosphorous copper,Ag Plating
- 6.Housing :PBT

Technical requirement

1. Insertion force: 5-8n (0.3-3.0kgf)
2. Pull out force: 5-8n (0.3-3.0kgf)
3. Contact resistance: ≤ 30mV
4. Insulation resistance: > 100mV DC 500V
5. Withstand voltage: AC 500V, no flashover and breakdown for 1min
6. Life: 10000 10 ~ 20 times / min
7. Rated load: DC 12V 1A
8. Applicable temperature range: - 25 ~ 85 °C

ANGLE TOLERANCE	PROJECTION	Description:
±3°		3.5mm phone jack audio connectors
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel
x.xxx ±0.10	Check:	Daniel
KLS P/N:		L-KLS1-TPJ3.5-006C
KLS NingBo KLS ELECTRONIC CO.,LTD.		