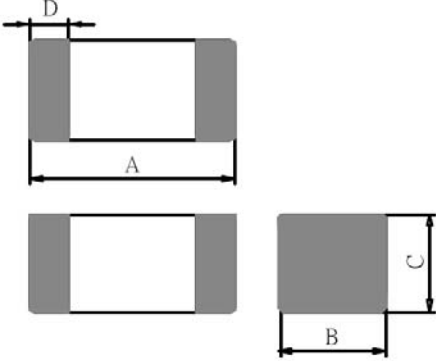


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:			
PART NO: LCB1005-100Y-N		DWG.NO: TE3215907			
CUSTOMER PART NO:		CUST.DWG.NO:			
<p>(1) DIMENSIONS (UNIT: mm)</p> 		A	1.00 ± 0.10 m/m		
		B	0.50 ± 0.10 m/m		
		C	0.50 ± 0.10 m/m		
		D	0.25 ± 0.15 m/m		
		E	m/m		
		F	m/m		
		G	m/m		
		H	m/m		
		I	m/m		
		J	m/m		
(2) ELECTRICAL REQUIREMENTS					
Z (Ω)	10 ± 25%			TEST FREQ	100MHz / 100mV
RDC (Ω)	0.03 (MAX)			TEST FREQ	
IDC (mA)	2000 (MAX)			TEST FREQ	
<p>TEST INSTRUMENTS</p> <p>HP4338A</p> <p>HP4291B</p>		APPROVED BY 吳載敏			
		CHECKED BY 張明德			
		DRAWN BY Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :					DATE :				
PART NO: LCB1005-100Y-N					DWG.NO: TE3215907				
CUSTOMER PART NO :					CUST.DWG.NO :				
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)		A	B	C	D	
FREQ	100MHz / 100mV								
SPEC	10 ± 25%	0.03 (MAX)	2000 (MAX)		1.00 ± 0.10	0.50 ± 0.10	0.50 ± 0.10	0.25 ± 0.15	
1	9.95	0.015	OK		1.02	0.52	0.53	0.26	
2	11.06	0.013	OK		1.03	0.54	0.52	0.25	
3	10.32	0.016	OK		1.02	0.50	0.50	0.25	
4	10.77	0.015	OK		1.02	0.52	0.50	0.25	
5	10.13	0.013	OK		1.00	0.54	0.53	0.24	
6	10.40	0.014	OK		1.03	0.51	0.52	0.24	
7	9.79	0.015	OK		1.01	0.52	0.53	0.24	
8	10.11	0.018	OK		1.03	0.53	0.53	0.26	
9	9.80	0.014	OK		1.02	0.52	0.52	0.25	
10	10.30	0.017	OK		1.02	0.52	0.51	0.26	
\bar{X}	10.26	0.015			1.02	0.52	0.52	0.25	
R	1.27	0.005			0.03	0.04	0.03	0.02	
						APPROVED BY			
						吳載敏			
						CHECKED BY			
						張明德			
						DRAWN BY			
						Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

LCB1005-100Y-N

