
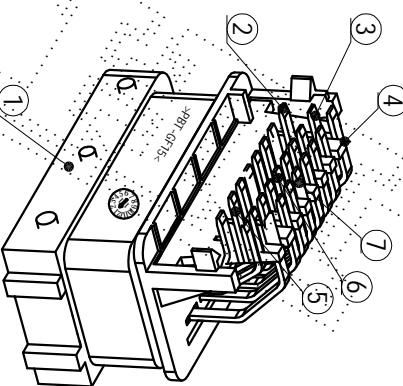
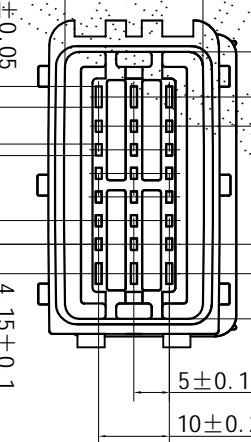



AHI-JS-DR-03-007

MARK	ECN	DESCRIPTION	DMN.	DATE



MARK	ECN	DESCRIPTION	DMN.	DATE

PCB board hole position diagram

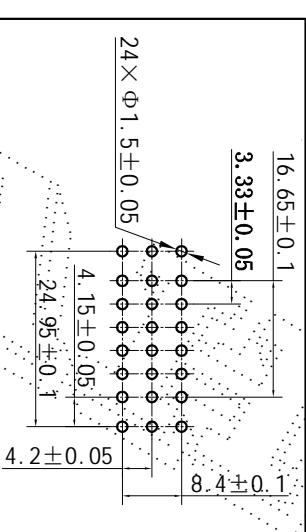

C

B

A

D

E

F

C

B

A

D

E

F

The technical requirements:  
1. parts shall not have flash and injection molding defects affect the use of,  
2. the product surface is clean, smooth, no deposition mark,

3. ◆ is the important characteristic, "★" as the key characteristics.  
4. dimensions without tolerance indication according to the GB/T14486-2008-MT6 level  
5. the product colour according to customer requirements

TABLE:

TYPE	COLOUR	PART NO.
DJ7241-1.5/2.8-11	GRAY	DJ7241-1.5/2.8-11-1
DJ7243-1.5/2.8-11	RED	DJ7243-1.5/2.8-11-1
DJ7244-1.5/2.8-11-1	BROWN	DJ7244-1.5/2.8-11-1
DJ7245-1.5/2.8-11-1	PINK	DJ7245-1.5/2.8-11-1

Yueqing Aohai Electric Co., Ltd.

24WAYS WAFER

SEE TABLE

NAME

24WAYS WAFER

DRAWN BY

CONFIRMED BY

APPROVED BY

HE

LJUO

2013.5.4

LONG

SUNHUA

2013.5.4

REV.

1st PERSON VIEW

FREE

UNIT

PAGE

1/1

NO. TOLERANCES	GB/T14486-2008-MT6	DIM. RANGE	DIM. TOLERANCES	DIM. RANGE	DIM. TOLERANCES	SEE TABLE	NAME	24WAYS WAFER	DRAWN BY	CONFIRMED BY	APPROVED BY
0~3	±0.23	>18~24	±0.41	(3)	2.8MM DDLE PIN	BRASS	t0.8	2	TIN-PATED	PART NO.	
>3~6	±0.26	>24~30	±0.45	(2)	2.8SHORT PIN	BRASS	t0.8	2	TIN-PATED	TYPE	SEE TABLE
>6~10	±0.29	>30~40	±0.50	(1)	SEE TABLE	PBT+GF15%	1	SEE TABLE	CLIENT NO.:		
>10~14	±0.33	>40~50	±0.57	No.	PART NO.	NAME	MATERIAL	Q'TY	COLOUR	MOULD NO.:	
>14~18	±0.37	>50~65	±0.65					1.0	①	1.25:1	mm 1/1

1

2

3

4

5