

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
T0-2	17-0164	1. 增加VDE 认证标志 2. 修改认证参数	Ethan	2017.06.26

备注一:

UL 标准

1. 额定电压与电流: 150V / 8A
2. 工频耐压: AC1500V/1Min.
3. 线径范围: 26~16AWG

IEC 标准

1. 污染等级	2	2	3
安装类别	II	III	III
额定脉冲电压(kV)	2.5KV	2.5KV	2.5KV
额定电压(V)	320V	250V	200V
额定电流(A)	9.5A		




2. 线径范围: 0.2~1.5mm²

备注二:



1. 尺寸标注符合标准 ASME Y14.5-2009
2. P距: 3.50mm, P数范围: N=04~48P
3. 剥线长度: 10.0mm
4. 使用温度范围: -40℃~+105℃
5. "⊗" 为重点管控尺寸, "[CPK]" 为CPK尺寸。
6. 00A 包装规范: SOP-Y-1256
7. 未注公差表:

P距方向公差(mm)		其他尺寸公差(mm)				
≤6	6~10	10~24	≤30	30~60	60~100	100~150
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70
						±1.00


8. 符合RoHS 环保要求

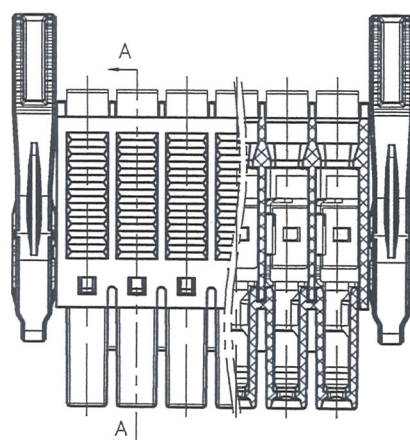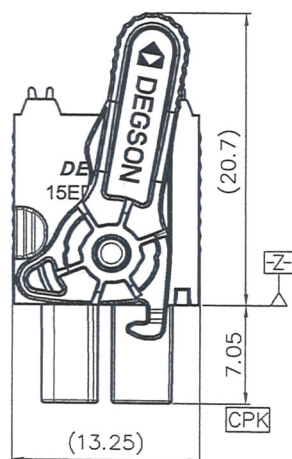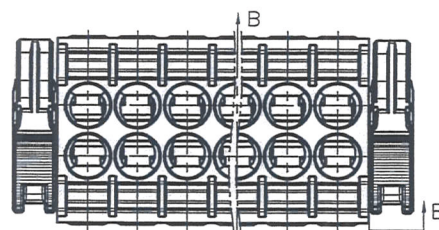

SEC B-B

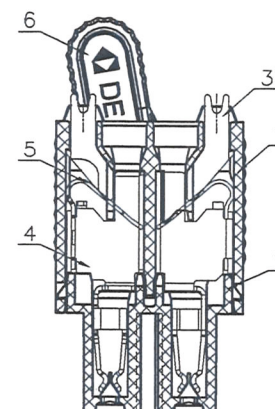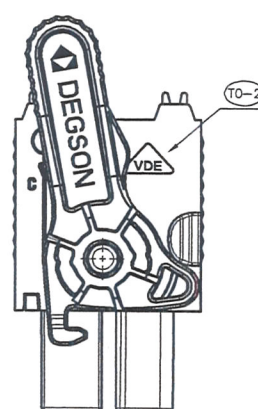

SEC A-A

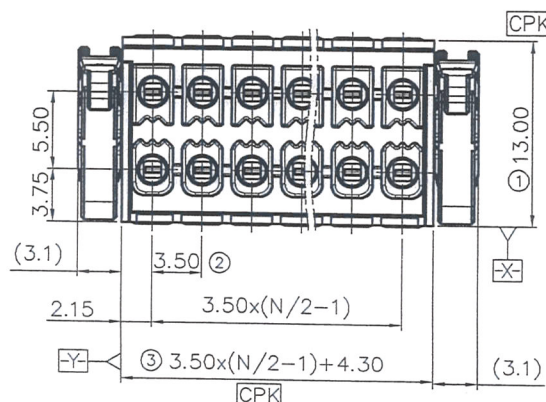

6	15EDGKNHG-3.5-旋转卡勾	1502JB501A(H)	2	POM	UL94HB
5	15EDGKNH-3.5-弹片	X000006520(H)	N	不锈钢	/
4	15EDGKNH-3.5-夹片	1508B00010(H)	N	磷青铜	镀锡
3	15EDGKNH-3.5-按钮	1508DB501A(H)	N	POM	UL94HB
2	15EDGKNH-3.5-边盖	1508CYXXA(H)	1	PA66	UL94V-0
1	15EDGKNHG-3.5-塑件	1502AYXXA(H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD			
APPD: <i>Alan 2017.7.21</i>		NAME: 15EDGKNHG-3.5-XXP-1Y-00A(H)			
CHKD: <i>Alan 2017.07.21</i>		TITLE: ASSEMBLY DRAWING			
DRFT: Ethan 2016.10.20		REV T0-2			
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGKNHG-3.5-E01			
		SHEET 1/1			
		DO NOT SCALE DRAWING SCALE 1:1			