




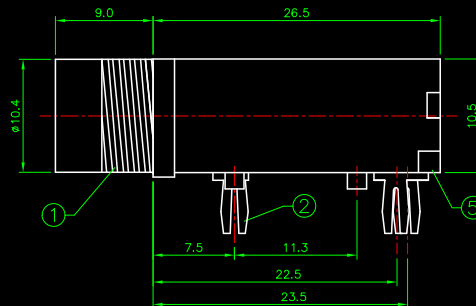

**P.C.B LAYOUT
TOP VIEW**



SCHEMATIC



SPECIFICATION

- 1.Rating : DC 50V 0.5A ;
- 2.Contact resistance : $\leq 0.03\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 5-25N ;
- 6.life test : 5,000 cycles .

6	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
5	COVER	1	ABS	
4	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Sb-Plating
3	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Sb-Plating
2	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Sb-Plating
1	HOUSING	1	ABS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT:MM



TYPE:

PHONE JACK

MODEL NO:

L-KLS1-TG6.3-009B

PAPER NO: A4		PAGE 1 OF 1	
TOLERANCE	ANGLES	SCALE	VER
±0.15	±1.5°	2:1	1

DESIGNER BY:

CHECK BY:

APPROVED BY:

KLS ELECTRONIC CO., LTD