

SPECIFICATION



Current Rating: 1 AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Dielectric Voltage: 100V AC for one minute
 Operation Temperature: -25°C to +85°C

MATERIAL


Insulator: LCP, UL94V-0
 Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 U R 2 B 0 1 M F - 1 0 5 G 0 B U H R X

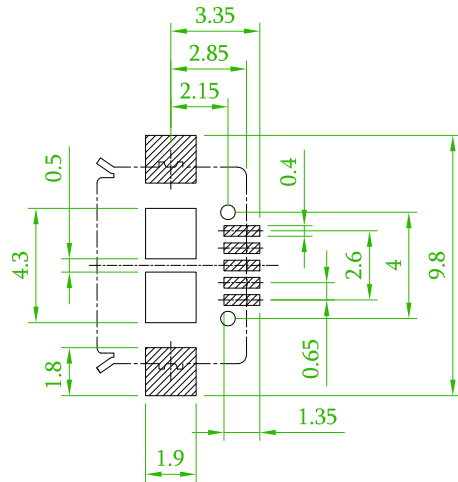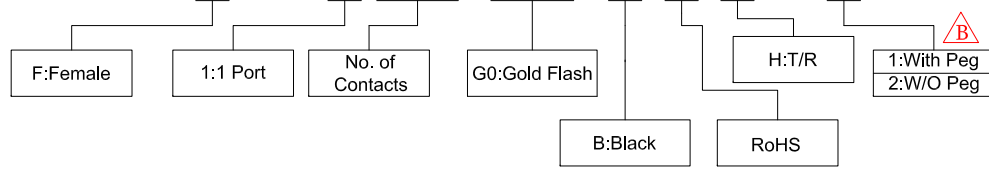



Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

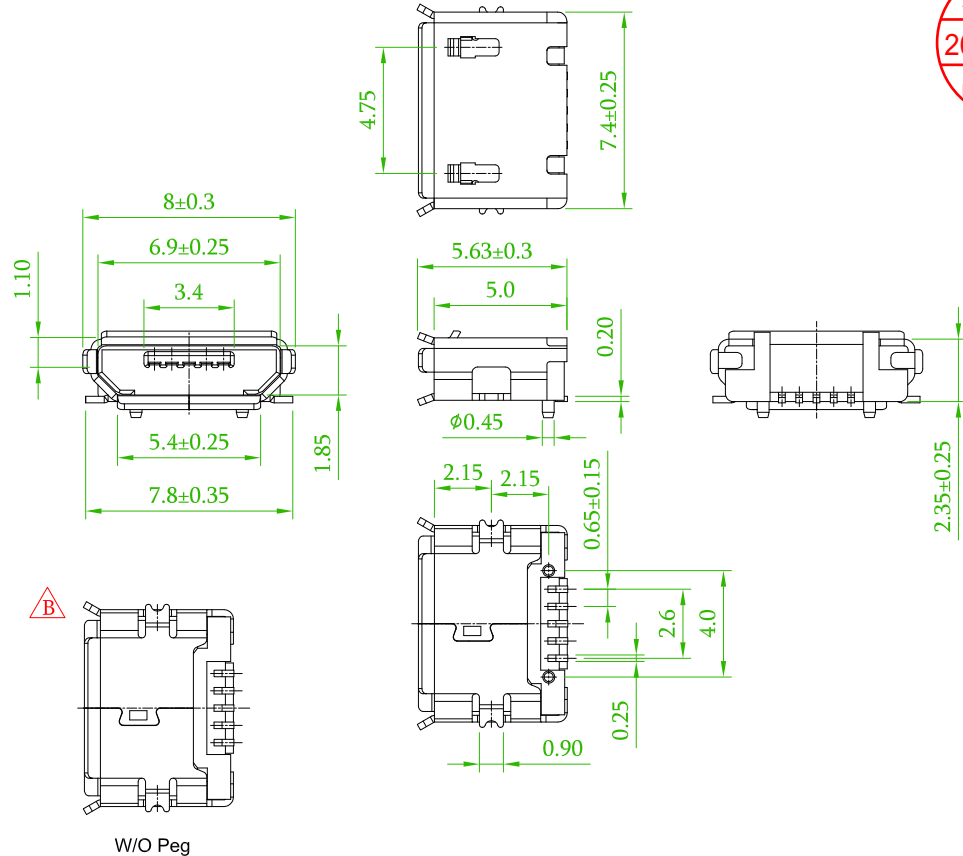

B

W/O Peg

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x2	Add an option: W/O Peg, drawing of w/o peg.	Gary	2018/06/27

 禮德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MICRO USB B TYPE FEMALE R/A SMT TYPE			頁數 Page	1/1
	品號 PART NO.	5UR2B01MF-105G0BUHRX			繪圖 DRAWN	Jeff 2016/11/16
	圖號 DRAWING NO.	GN033-JF015			核對 CHECKED	Josh 2018/06/27
	客戶品號 CUSTOMER P/N				承認 APPROVED	Jason 2018/06/27
	公差 TOLERANCE	.X ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.XX ±0.15				