
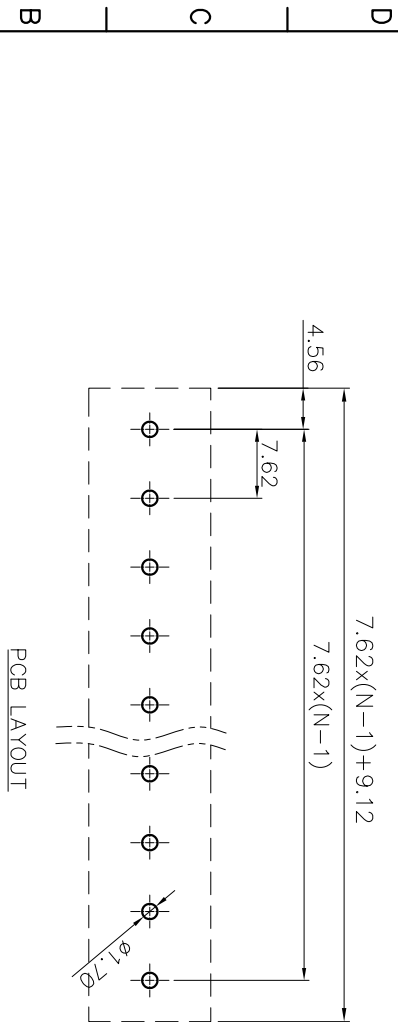
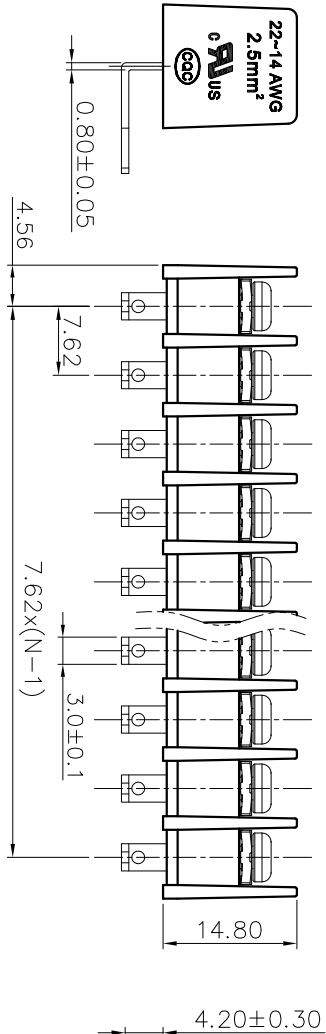



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

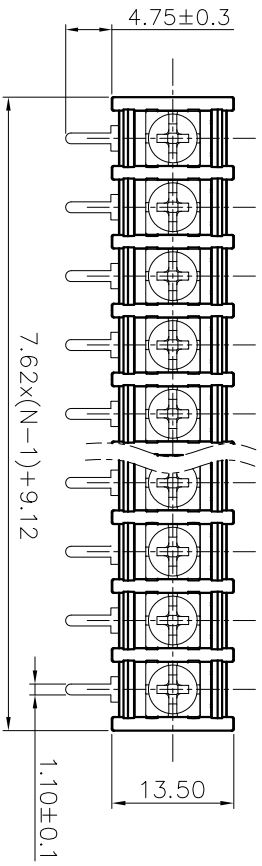

- NOTES1:
- UL Standard
  - Rated voltage/current : 300V / 15A
  - Torque value : M3 , 4.43lb.in
  - Wire range : 22~14AWG
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
  - Pitch : 7.62mm, Poles : N=02~24P
  - Withstanding voltage : AC1600V/1Min
  - Operating temperature: -40°C~+105°C
  - Undimensioned tolerances:

Pitch range	In mm		Nominal dimension range		Tolerance
	Over	TO	Over	TO	
6	6	10	30	60	0.1/0
10	10	24	30	100	<
24	30	60	60	150	<
60	100	150	100	150	<
150	150	150	150	150	±2°

6. RoHS Compliance

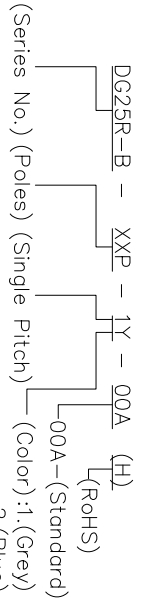

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

PART NO.:		/		NAME:		NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:		/		TITLE:		CUSTOMER DRAWING	
CHKD:		/		DRAWING NO.:		/	
DRFT:		/		REV		DO	
THIRD ANGLE PROJECTION				SHEET		1/1	
				SCALE		1:1	

DETACHED LISTS

A 8 7 6 5 4 3 2 1