
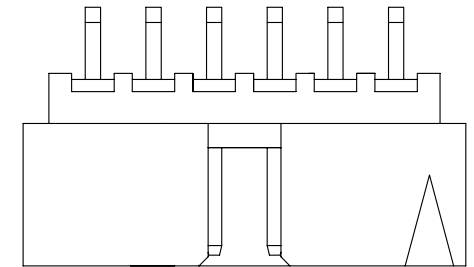
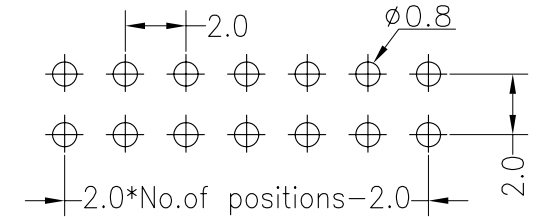


SPECIFICATIONS



Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:400V AC/DC
 Insulation Resistance:800MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

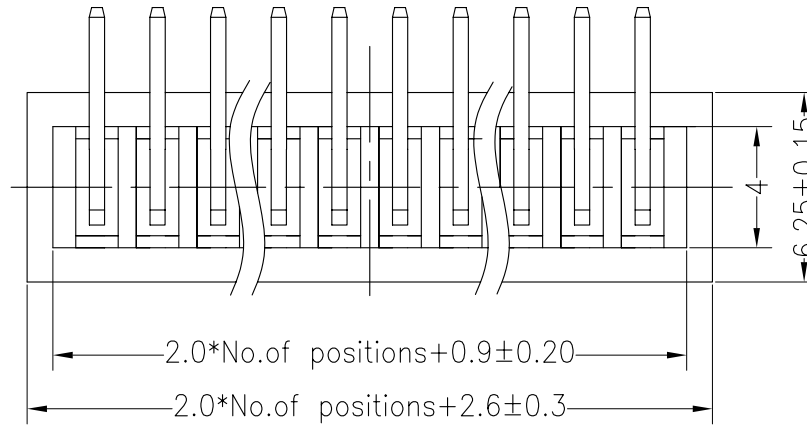

TYPE FOR 6~12Pin

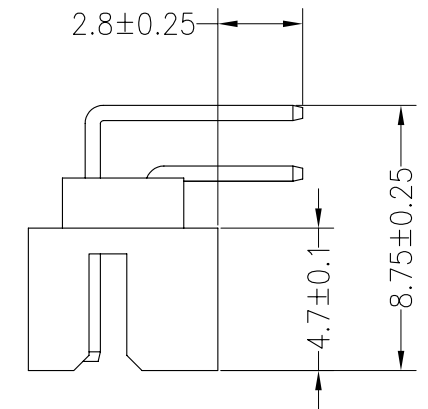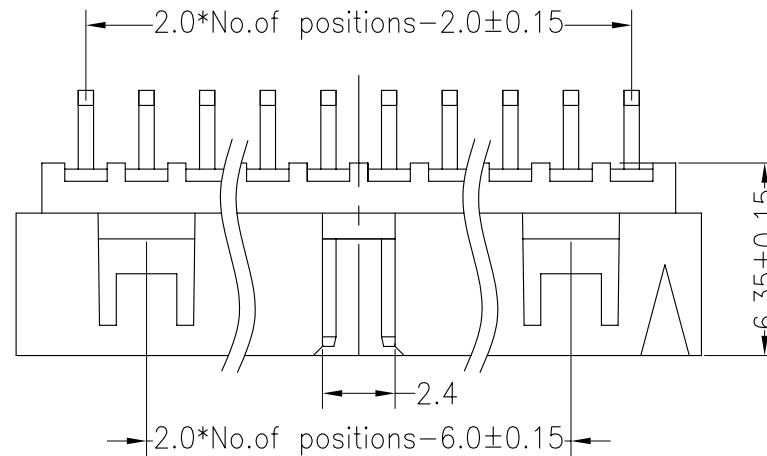

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	KLS ELECTRONIC CO., LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	PART NO.	L-KLS1-202H-XX-R-B
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM				TOL	PROJ.	◆	□