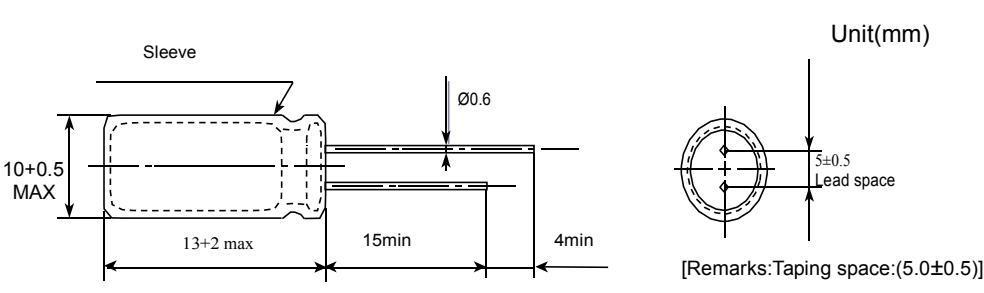


Aluminum Electrolytic Capacitor Specification

Series	PS	35V330uF	Part No.	PS-035V330AX130-T5
Customer no	/		Case Size	ΦD 10 x L13
Specification	Items		Standard	
	Operating temperature range		-40~+105 °C	
	Capcitanace tolenrance		±20% (20±2°C,120Hz)	
	Dissipation Factor (MAX)		(Less than) 0.14 (20±2°C,120Hz)	
	Leakage current (MAX)		(Less than) 115.5 (20±2°C,35V 2 min)	
	Impedance (MAX)		/	
	Ripple current (MAX)		350 mArms (120KHZ,105°C)	
	Lond life		2000hrs	
Outline	Sleeve color		Coffee	
	Marking color		White	
	(Dimensions)			
	 <p style="text-align: center;">Unit(mm)</p> <p style="text-align: center;">[Remarks: Taping space: (5.0±0.5)]</p>			
Recorder	(The first edition): 2018-01-19			
Wrote by: Dengweiping		Checked by: Zhangguang		Approved by: Liyan