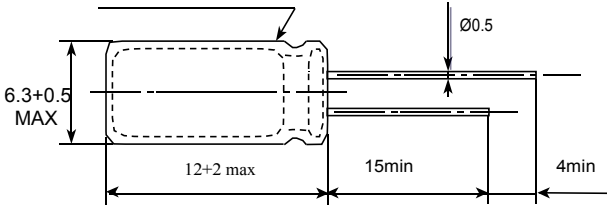



Aluminum Electrolytic Capacitor Specification

Series	PS	50V47uF	Part No.	PS-050V47AX120-T2.5
Customer no	/		Case Size	ΦD 6.3 x L12
Specification	Items		Standard	
	Operating temperature range		-40~+105 ℃	
	Capcitanace tolenrance		±20% (20±2℃,120Hz)	
	Dissipation Factor (MAX)		(Less than) 0.12 (20±2℃,120Hz)	
	Leakage current (MAX)		(Less than) 23.5 (20±2℃,50V 2 min)	
	Impedance (MAX)		/	
	Ripple current (MAX)		110 mArms (120KHz,105℃)	
	Lond life		2000hrs	
Outline	Sleeve color		Coffee	
	Marking color		White	
	(Dimensions)			
	<div><div><p>Sleeve</p></div><div><p>Unit(mm)</p><p>[Remarks:Taping space:(2.5±0.5)]</p></div></div>			
Recorder	(The first edition): 2018-01-19			
Wrote by:Dengweiping			Checked by: Zhangguang	Approved by:Liyan