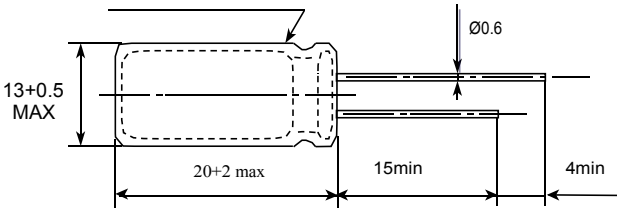



Aluminum Electrolytic Capacitor Specification

Series	CD11GL	400V22uF	Part No.	CD11GL-400V022AX200-T5
Customer no.	/		Case Size	ΦD 13 x L20
Specification	Items		Standard	
	Operating temperature range		-40~+105 ℃	
	Capcitanace tolenrance		±20% (20±2℃,120Hz)	
	Dissipation Factor (MAX)		(Less than) 0.15 (20±2℃,120Hz)	
	Leakage current (MAX)		(Less than) 186 (20±2℃,400V 2 min)	
	Impedance (MAX)		/	
	Ripple current (MAX)		185 mArms (120KHz,105℃)	
	Lond life		5000hrs	
Outline	Sleeve color		Purple	
	Marking color		White	
	(Dimensions)			
	<div><div><p>Sleeve</p></div><div><p>Unit(mm)</p></div></div>			
Recorder	(The first edition): 2018-01-19			
Wrote by:Dengweiping			Checked by: Zhangguang	Approved by:Liyan