



正视图

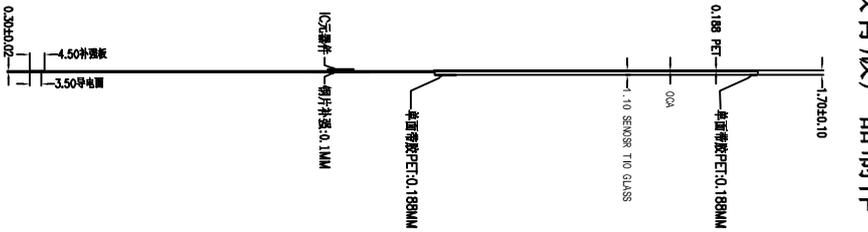


侧视图

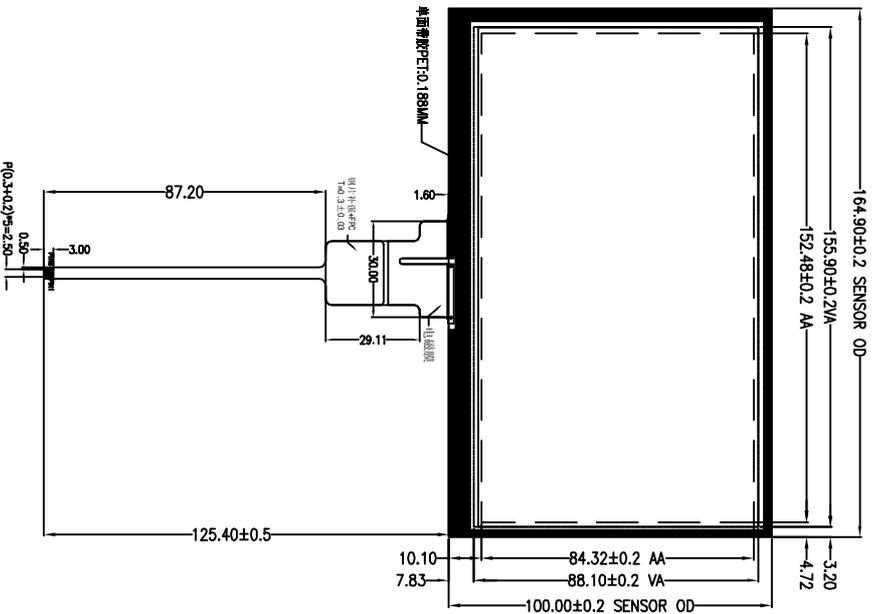

背视图

- 技术参数
1. PET+ITO Glass+背胶+FFPC
 - ITO GLASS: 1.1mm
 - PET: 0.188mm
 - IC: GT911
 - 引线: FFPC (PINCH=0.5mm)
 - 总厚度: 1.70±0.10mm
 2. 工作电压: 2.8V-3.3 V
 3. 透光率: ≥87%
 4. 表面硬度: 3H
 5. 使用寿命: 打点 ≥2亿次
 6. 工作环境: -20℃~+70℃
 7. 储存环境: -30℃~+80℃
 8. 未注尺寸公差按 ±0.2mm

I2C Interface	
Shutdowm	1
VCC	2
GND	3
INT	4
SDA	5
SCL	6



FPC:HST127T17R10310

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES MILLIMETERS
TOLERANCES: ANGLES ±1°
XX" ±.02"
XXX" ±.005"
OR
0.Xmm ±0.5mm
0.XXXmm ±0.13mm

DRAWN BY: **FML**

DATE: 15-06-01

CHECKED BY:

DATE:

Tel: (86-755) 29643468 Fax: (86-755) 29643799 http://www.hsttp.com

DRAWING NO.:



REV

A

DESCRIPTION

由 Autodesk 教育版产品制作

DATE:

TITLE:

SHEET NO.:

1 OF 1