

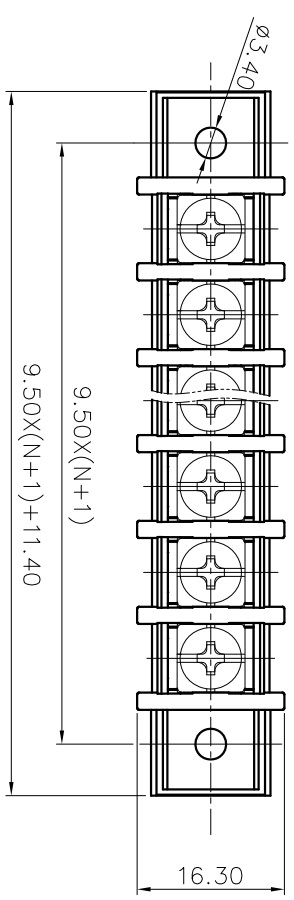



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

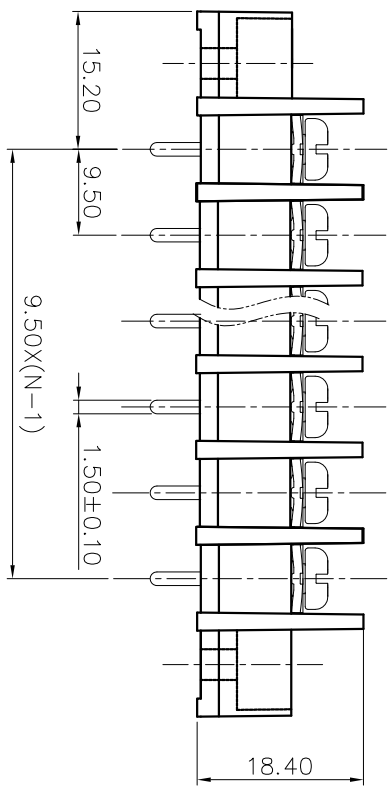



- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 25A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 22~12AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 9.50mm, Poles : N=02~24P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:



5.20±0.30

Pitch range	in	mm	Over	Over	Over	Over	Over	Over	Over	
6	TO	10	TO	30	TO	60	TO	100	TO	150
10	TO	24	TO	30	TO	60	TO	100	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	±2	±2

6. RoHS Compliance

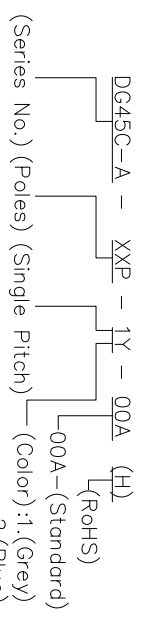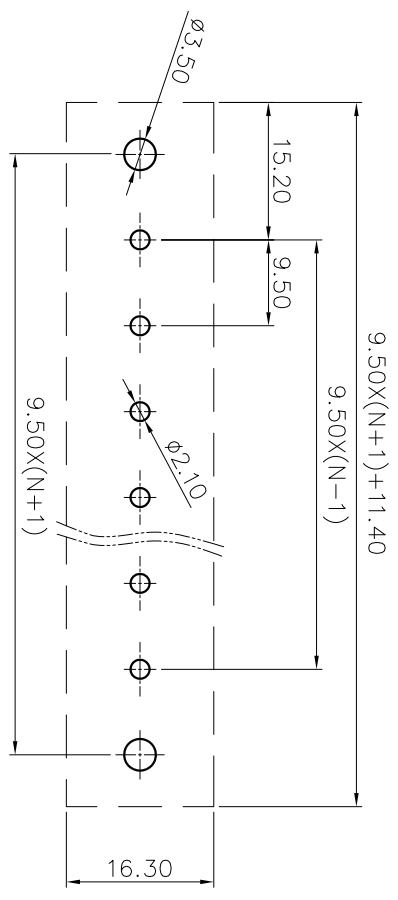

- (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	宁波高松电子有限公司
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1