

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:



- UL Standard
- 1. Rated voltage/current : 300V / 25A
- 2. Torque value : M4 , 10.53lb.in
- 3. Wire range : 22~12AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 9.50mm, Poles : N=02~24P
- 3. Withstanding voltage : AC1600V/1Min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension range		in mm	
	Over	TO	Over	TO	Over	TO
6	10	10	30	60	100	150
10	24	30	60	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±2°

6. RoHS Compliance

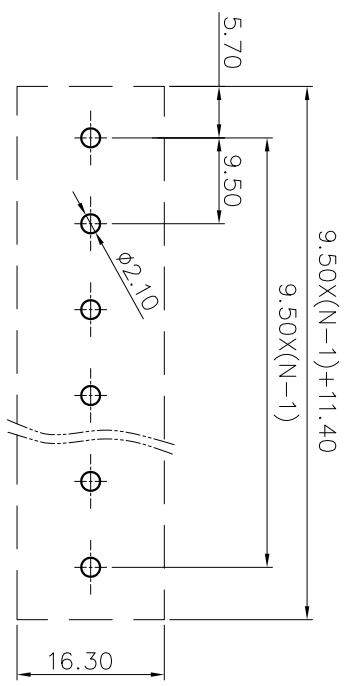

- (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SCALE	1:1