



1.0±0.05

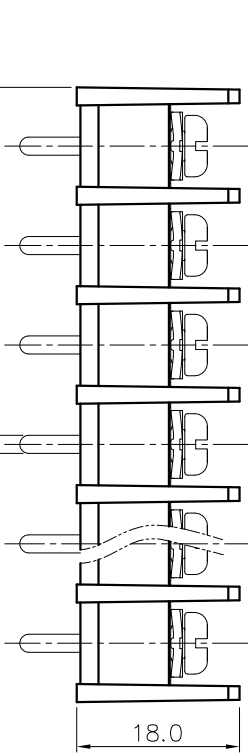


6.50
11.0
11.0X(N-1)
2.0±0.05

18.0



0.30±0.30



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:


- UL Standard
- Rated voltage/current : 300V / 20A
- Torque value : M4 , 10.53lb.in
- Wire range : 22~12AWG

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 11.0mm, Poles : N=02~22P
- Withstanding voltage : AC1600V/1Min
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch	range in mm		Nominal dimension range		mm	in	
	Over	TO	Over	TO			
6	10	10	30	60	100	150	0.1/10
10	24	24	30	60	100	150	<
15	30	30	50	70	100	150	±2°

6. RoHS Compliance

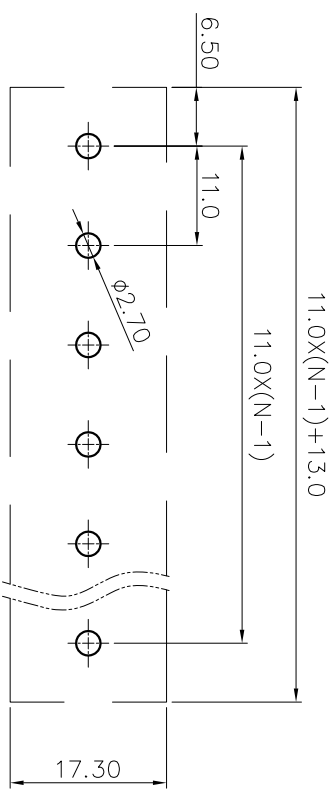

PCB LAYOUT

DG65C-B - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
(RoHS)
00A-(Standard)

- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1