

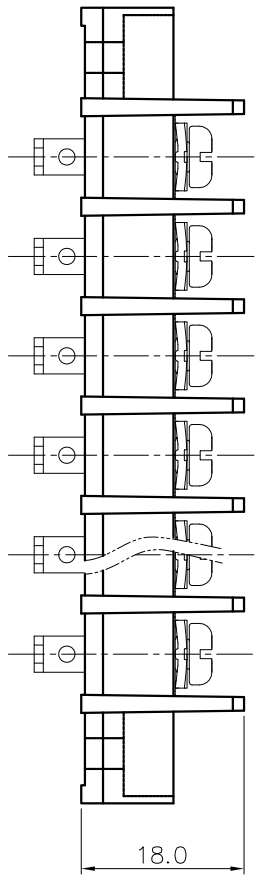



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

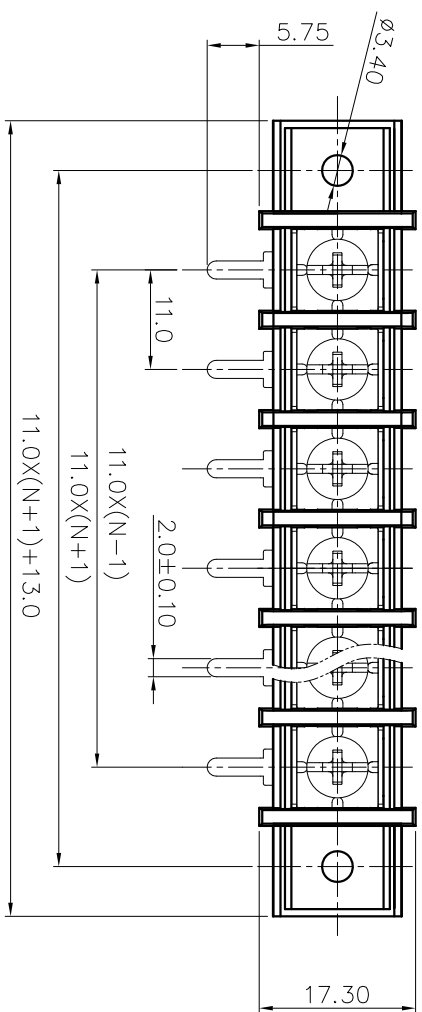


- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 22~12AWG


- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 11.0mm, Poles : N=02~20P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range	in	Nominal dimension	range	mm	in	mm	in
Over	6	10	30	60	100	150	0.1/0
TO	10	24	30	60	100	150	<
TO	10	24	30	60	100	150	±2°
TO	10	24	30	60	100	150	±1.30
TO	10	24	30	60	100	150	±2°

6. RoHS Compliance

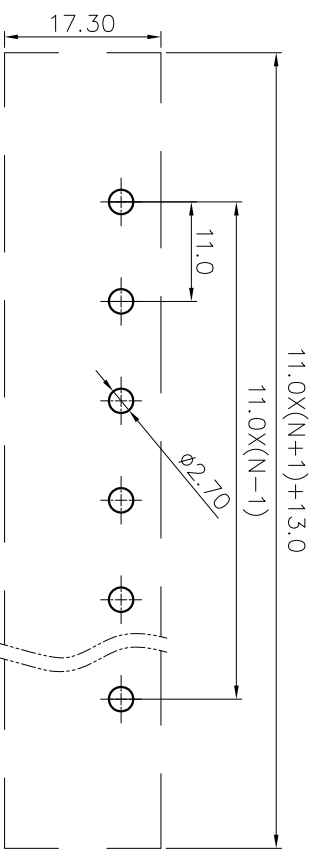

PCB LAYOUT

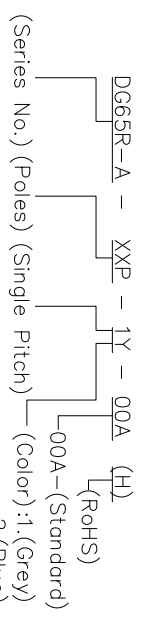

- (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1