

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

UL Standard






1. Rated voltage/current : 300V / 20A
2. Torque value : M3 , 4.43Lb.in
3. Wire range : 22~12AWG

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 8.25mm, Poles : N=02~22P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch Range	In mm		Nominal Dimension Range		mm	In	D
	Over	TO	Over	TO			
6	10	24	30	60	100	150	0.1/1/0
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°

6. RoHS Compliance

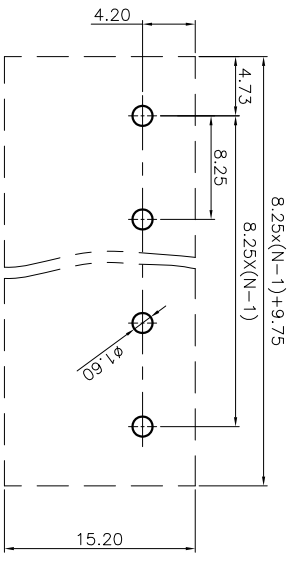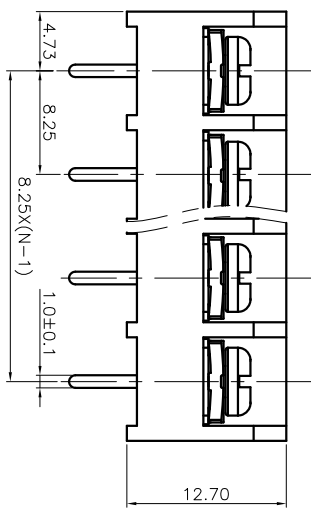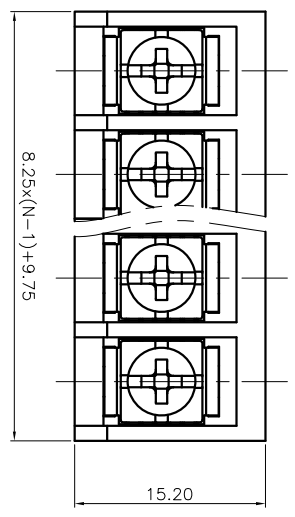

DG36S-B - XXP - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	DRFT:	DO NOT SCALE DRAWING
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	1/1
THIRD ANGLE PROJECTION		SCALE	1:1

PCB LAYOUT

NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司

NAME: DG36S-B-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: 1/1

SCALE: 1:1