

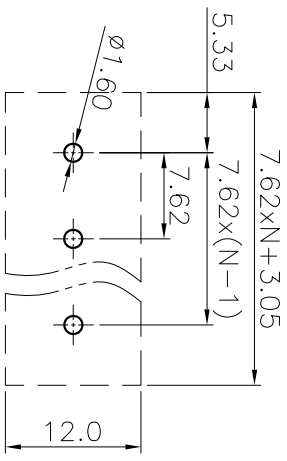
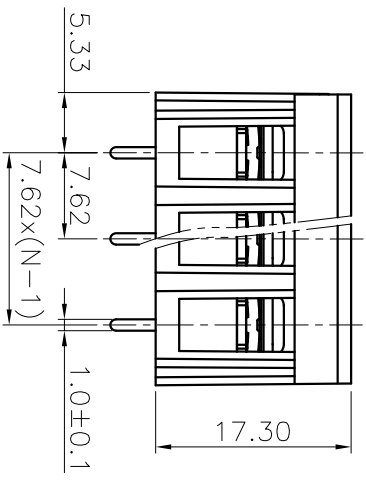



(W/O COVER)

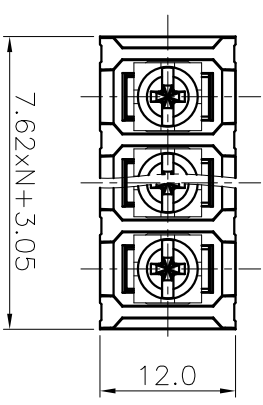

PCB LAYOUT

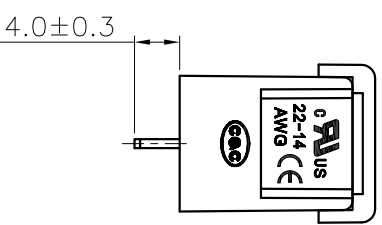

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:


- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Torque value : M3 , 4.43Lb.in
- 3. Wire range : 22~14AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 7.62mm, Poles : N=02~26P
- 3. Withstanding voltage : AC1600V/1min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in		mm		Over	Over	Over	Over	Over
	mm	in	mm	in					
6	TO	10	TO	30	60	100	150	0.1	1/10
10	TO	24	TO	30	60	100	150	<	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	±2°

6. RoHS Compliance

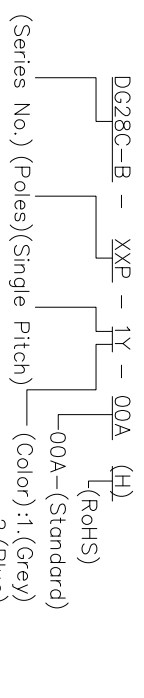

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	DG28C-B-XXP-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1