
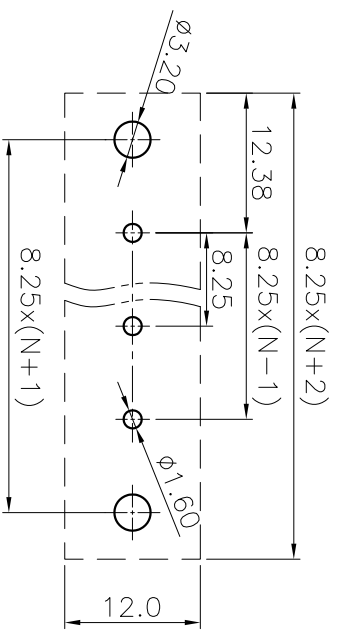
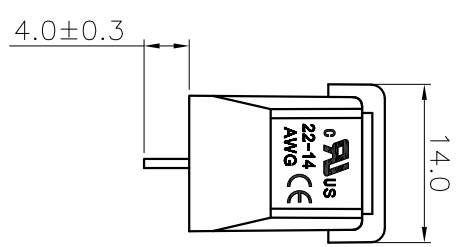
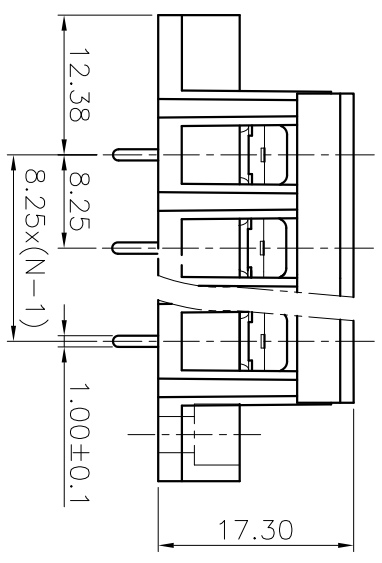



(W/O COVER)

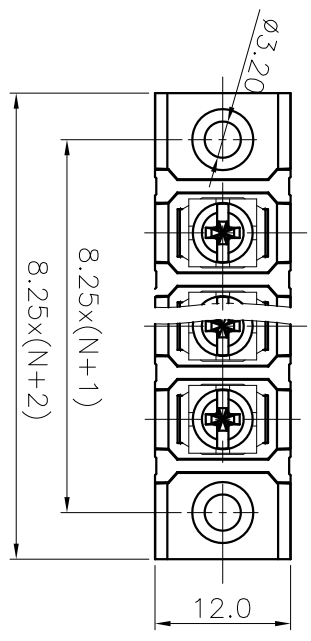

NOTES1:


- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Torque value : M3 , 4.43lb.in
- 3. Wire range : 22~14AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 8.25mm, Poles : N=02~24P
- 3. Withstanding voltage : AC1600V/1min
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension range		in mm	
	Over	TO	Over	TO	Over	TO
6	10	10	30	60	100	150
10	24	30	60	100	150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00 ±1.30

6. RoHS Compliance

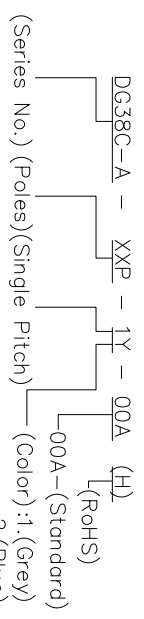

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	DG38C-A-XXP-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV
DRFT:	/	DRAWING NO.:	SHEET
		THIRD ANGLE PROJECTION	SCALE
			DO NOT SCALE DRAWING
			1:1