





REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE


(W/O COVER)

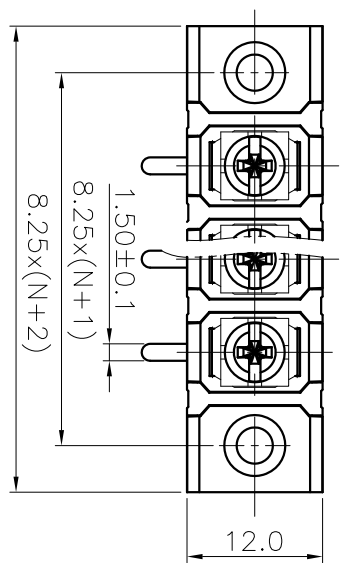

0.80±0.05

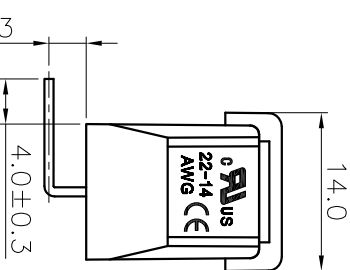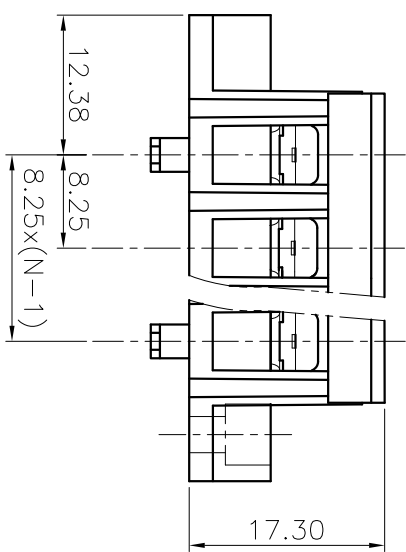

3.30±0.3





- NOTES1:
- UL Standard
 - 1. Rated voltage/current : 300V / 15A
 - 2. Torque value : M3 , 4.43Lb.in
 - 3. Wire range : 22~14AWG

- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 8.25mm, Poles : N=02~24P
 - Withstanding voltage : AC1600V/1Min
 - Operating temperature: -40°C~+105°C
 - Undimensioned tolerances:

Pitch range	in	mm	Nominal dimension	range	Over	Under
6	10	30	60	100	150	0.1/0
TO	TO	TO	TO	TO	TO	<
10	24	30	60	100	150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00 ±1.30

6. RoHS Compliance

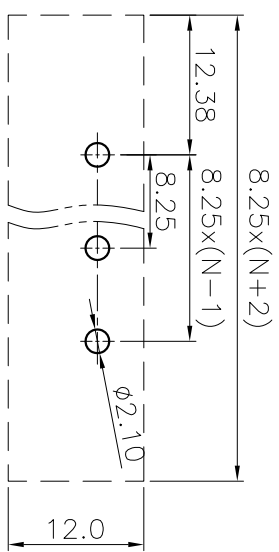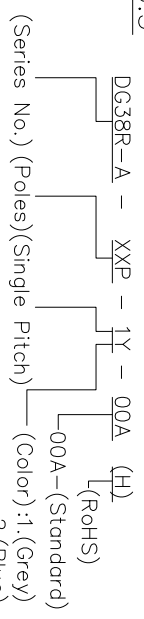

PCB LAYOUT

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1