



HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

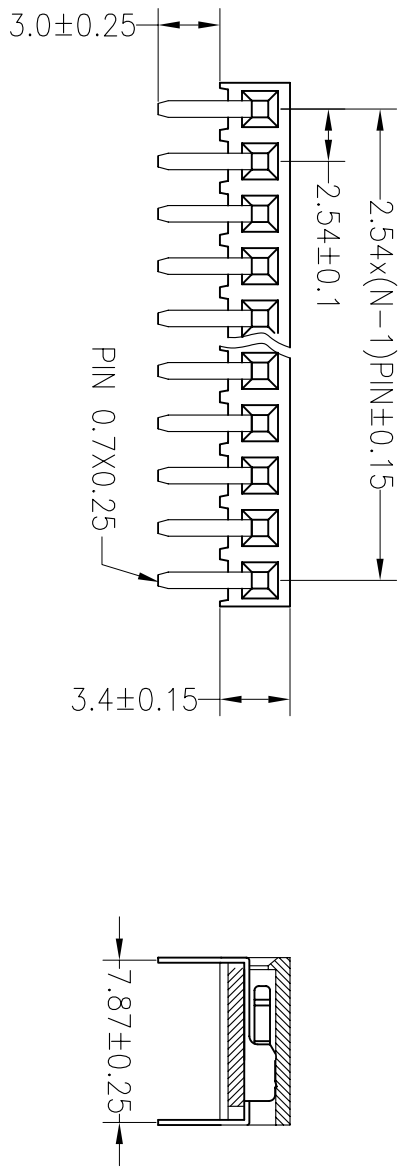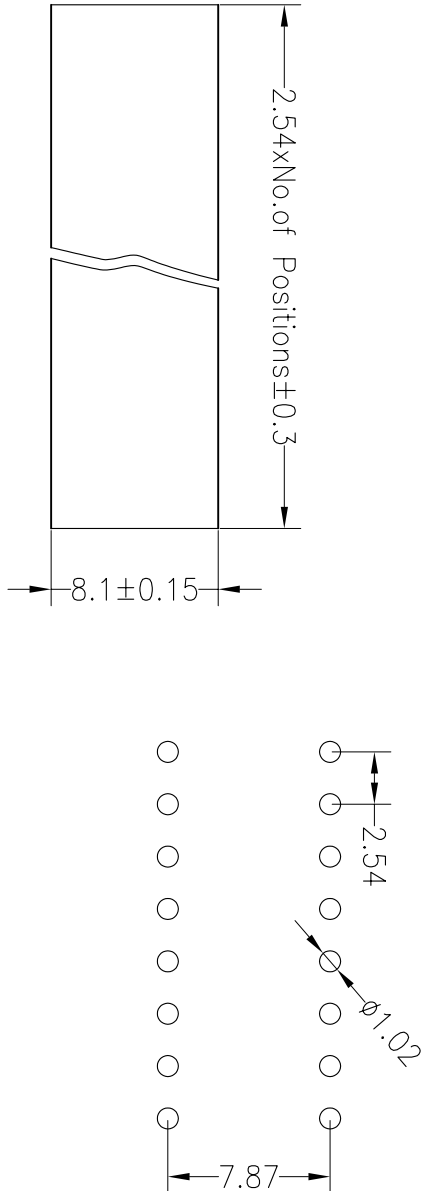

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	Y/YuSheng	12.04.18	SCALE	FIT	PART NO.	TITLE:
A0	2012.04.18	NEW DRAWING		X.X ±0.30	CHECK			UNIT	mm	L-KLS1-208A-8.1-1-03-R	2.54PF H8.1*W3.4mm 1xNpin 90° Side Entry
1				X.XX ±0.20				SIZE	A4		
				X.XXX ±0.10				SHEET	1/1		
				Angle ±3°	APPROVE			PROJ.			
				DIM	TOL						

KLS electronic
 NINGBO KLS ELECTRONIC CO.,LTD.