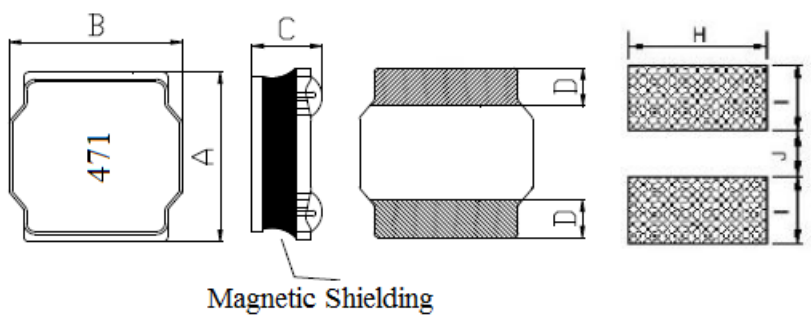
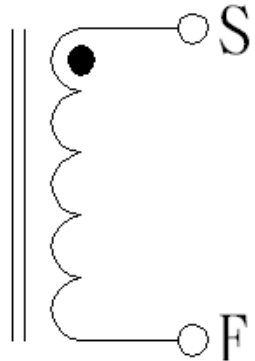


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: NR6028-471M		DWG.NO: SL0070166	
CUSTOMER PART NO:		CUST.DWG.NO:	
<p>(1) DIMENSION(UNIT: mm)</p> 		A	6.0 ± 0.3 m/m
		B	6.0 ± 0.3 m/m
		C	2.8+0.2/-0.3 m/m
		D	1.85 (REF) m/m
		E	m/m
		H	5.7 (REF) m/m
		I	2.0 (REF) m/m
		J	2.4 (REF) m/m
		K	m/m
			m/m
			m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	470 ± 20%		
RDC (Ω)	2.99 (MAX)		
IDC (A)	0.28 (MAX)		
TEST CONDITION	100KHZ / 0.25V		
(4)REMARK: IDC for Inductance drop 30% from its value without current		APPROVED BY 吳載敏	
		CHECKED BY 張明德	
		DRAWN BY Vicky	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: NR6028-471M				DWG.NO: SL0070166			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.25V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	470 ± 20%	2.99 (MAX)	0.28 (MAX)	6.0 ± 0.3	6.0 ± 0.3	2.8 +0.2/-0.3	
1	460	2.32	OK	5.99	6.00	2.87	
2	453	2.32	OK	5.99	5.97	2.92	
3	462	2.33	OK	6.01	5.97	2.88	
4	455	2.32	OK	6.02	5.94	2.85	
5	465	2.33	OK	5.97	5.95	2.88	
6	460	2.32	OK	5.99	6.00	2.87	
7	453	2.32	OK	5.99	5.97	2.92	
8	462	2.33	OK	6.01	5.97	2.88	
9	455	2.32	OK	6.02	5.94	2.85	
10	465	2.33	OK	5.97	5.95	2.88	
\bar{X}	459	2.32		6.00	5.97	2.88	
R	12	0.01		0.05	0.06	0.07	
TEST INSTRUMENTS GKT-3250 GKT-502BC CH2816+WR7210				APPROVED BY 吳載敏			
				CHECKED BY 張明德			
				DRAWN BY Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw