


## MZ Ultra Low Impedance Series

Low Impedance   
 Miniaturized   
 Solvent Proof




- Low impedance compared with MK series
- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstanding 5000 hours load life at 105°C (2000 ~ 3000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive



Item	Characteristics																		
<b>Operating temperature range</b>	-40 ~ +105°C																		
<b>Leakage current max.</b>	I = 0.01CV or 3µA whichever is greater (after 2 minutes) I = 0.03CV or 4µA whichever is greater (after 1 minute)																		
<b>Capacitance tolerance</b>	±20% at 120Hz, 20°C																		
<b>Dissipation factor max. (at 120Hz, 20°C)</b>	Capacitance > 1000µF : tanδ increases by 0.02 for each 1000µF from below value. <table border="1"> <tr> <td>WV</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table>	WV	6.3	10	16	25	35	50	63	100	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
WV	6.3	10	16	25	35	50	63	100											
tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08											
<b>Low temperature characteristics (Impedance ratio at 120Hz)</b>	<table border="1"> <tr> <td>Z-40°C / Z+20°C</td> <td>Z-25°C / Z+20°C</td> </tr> <tr> <td>3</td> <td>2</td> </tr> </table>	Z-40°C / Z+20°C	Z-25°C / Z+20°C	3	2														
Z-40°C / Z+20°C	Z-25°C / Z+20°C																		
3	2																		
<b>Load life</b>	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage. <table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>tanδ</td> <td>Less than 200% of specified value</td> </tr> </table> <table border="1"> <tr> <td>∅D</td> <td>∅D = 5, 6.3</td> <td>∅D = 8</td> <td>∅D ≥ 10</td> </tr> <tr> <td>Life time</td> <td>2000 hours</td> <td>3000 hours</td> <td>5000 hours</td> </tr> </table>	Leakage current	Less than specified value	Capacitance change	Within ±25% of initial value	tanδ	Less than 200% of specified value	∅D	∅D = 5, 6.3	∅D = 8	∅D ≥ 10	Life time	2000 hours	3000 hours	5000 hours				
Leakage current	Less than specified value																		
Capacitance change	Within ±25% of initial value																		
tanδ	Less than 200% of specified value																		
∅D	∅D = 5, 6.3	∅D = 8	∅D ≥ 10																
Life time	2000 hours	3000 hours	5000 hours																
<b>Shelf life (at 105°C)</b>	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																		

### ● DRAWING

Unit : mm

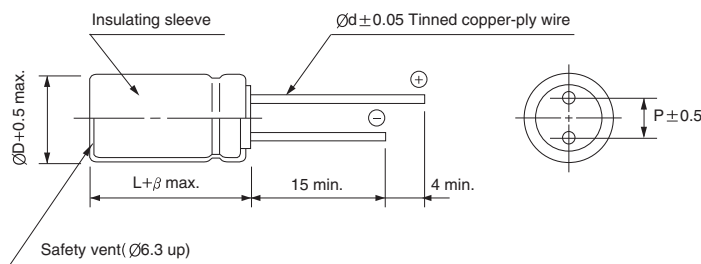

∅D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
∅d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

### ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF \ Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33	0.42	0.70	0.90	0.95	1.00
47 ~ 270	0.50	0.73	0.92	0.96	1.00
330 ~ 680	0.55	0.77	0.94	0.97	1.00
1000 ~ 1500	0.60	0.80	0.96	0.98	1.00
2200 ~	0.70	0.85	0.98	0.99	1.00

# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

**MZ** series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
4.7										5×11	0.35	250
10							5×11	0.35	250	5×11	0.35	250
22	5×11	0.35	250	5×11	0.35	250	5×11	0.35	250	5×11	0.35	250
33	5×11	0.35	250	5×11	0.35	250	5×11	0.35	250	5×11	0.35	250
47	5×11	0.30	250	5×11	0.30	250	5×11	0.30	250	5×11	0.30	250
100	5×11	0.30	250	5×11	0.30	250	6.3×11	0.15	405	6.3×11	0.15	405
150	6.3×11	0.15	405	6.3×11	0.15	405	6.3×11	0.15	405	8×11.5	0.10	760
220	6.3×11	0.15	405	6.3×11	0.15	405	8×11.5	0.072	760	8×11.5	0.10	760
330	6.3×11	0.15	405	8×11.5	0.12	760	8×11.5	0.072	760	10×12.5	0.08	1030
470	8×11.5	0.072	760	8×11.5	0.10	760	10×12.5	0.053	1030	10×16	0.045	1430
680	10×12.5	0.053	1030	10×12.5	0.053	1030	10×16	0.038	1430	10×20	0.032	1820
1000	10×12.5	0.053	1030	10×16	0.038	1430	10×20	0.027	1820	12.5×20	0.025	2360
1500	10×20	0.027	1820	10×20	0.032	1820	12.5×20	0.025	2360	16×20	0.020	3460
2200	12.5×20	0.025	2360	12.5×20	0.025	2360	12.5×25	0.018	2770	16×25	0.015	3460
3300	12.5×20	0.025	2360	12.5×25	0.024	2770	16×25	0.015	3460	16×31.5	0.015	3680
4700	16×25	0.015	3460	16×25	0.015	3460	16×31.5	0.015	3680	18×35.5	0.014	3800
6800	16×25	0.015	3460	16×31.5	0.015	3680	18×35.5	0.014	3800			
10000	16×31.5	0.015	3680	18×35.5	0.014	3800						
15000	18×35.5	0.014	3800									

WV Item μF	35			50			63			100		
	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	∅D×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5×11	2.0	250						
2.2				5×11	2.0	250				5×11	2.0	125
3.3				5×11	1.0	250	5×11	2.0	165	5×11	2.0	125
4.7	5×11	0.35	250	5×11	1.0	250	5×11	2.0	165	5×11	2.0	125
10	5×11	0.35	250	5×11	0.55	250	5×11	0.80	165	6.3×11	0.50	205
22	5×11	0.35	250	5×11	0.45	250	6.3×11	0.50	265	8×11.5	0.30	355
33	5×11	0.30	250	6.3×11	0.25	405	6.3×11	0.50	265	10×12.5	0.25	450
47	6.3×11	0.15	405	6.3×11	0.20	405	8×11.5	0.30	500	10×16	0.20	580
100	8×11.5	0.072	760	8×11.5	0.105	760	10×16	0.10	945	12.5×20	0.10	1045
150	8×11.5	0.072	760	10×12.5	0.061	1030	10×20	0.08	1100	12.5×25	0.070	1195
220	10×12.5	0.065	1030	10×20	0.038	1430	10×25	0.07	1300	16×25	0.060	1600
330	10×16	0.038	1430	10×20	0.032	1820	12.5×20	0.04	1495	16×31.5	0.040	1750
470	10×20	0.027	1820	12.5×20	0.027	2360	16×20	0.035	1990	18×40	0.030	2060
680	12.5×20	0.025	2360	12.5×25	0.022	2770	16×25	0.030	2780			
1000	12.5×25	0.022	2770	16×25	0.018	3460	16×35.5	0.020	2835			
1500	16×25	0.018	3460	16×31.5	0.015	3680						
2200	16×31.5	0.015	3680	18×35.5	0.014	3800						
3300	18×35.5	0.014	3800									