



# TEST DATA

CUSTOMER:				DATE:			
PART NO: SRI1209-220M				DWG.NO: MY0263502			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHZ / 1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	22 ± 20%	0.04 (MAX)	7.5 (MAX)	12.0 ± 0.5	12.0 ± 0.5	10.0 (MAX)	
1	24.3	0.027	OK	12.07	12.07	9.49	
2	23.6	0.028	OK	12.04	12.03	9.51	
3	25.3	0.028	OK	12.04	12.07	9.54	
4	26.1	0.026	OK	12.04	12.03	9.51	
5	22.4	0.027	OK	12.07	12.07	9.49	
6	26.1	0.028	OK	12.05	12.04	9.51	
7	22.7	0.027	OK	12.08	12.06	9.52	
8	23.6	0.026	OK	12.05	12.04	9.51	
9	24.5	0.028	OK	12.08	12.06	9.52	
10	23.5	0.028	OK	12.04	12.07	9.54	
$\bar{X}$	24.2	0.027		12.06	12.05	9.51	
R	3.7	0.002		0.04	0.04	0.05	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				吳載敏			
				CHECKED BY			
				張明德			
				DRAWN BY			
				LISA			


**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# INDUCTANCE VS CURRENT

CUSTOMER:	DATE:
PART NO: SRI1209-220M	DWG.NO: MY0263502
CUSTOMER PART NO :	CUST.DWG.NO :

CURRENT VS INDUCTANCE					
IDC(A)	INDUCTION(uH)				
0	21.9				
3.0	21.7				
5.0	21.5				
7.0	20.0				
7.5	18.3				
8.3	16.3				

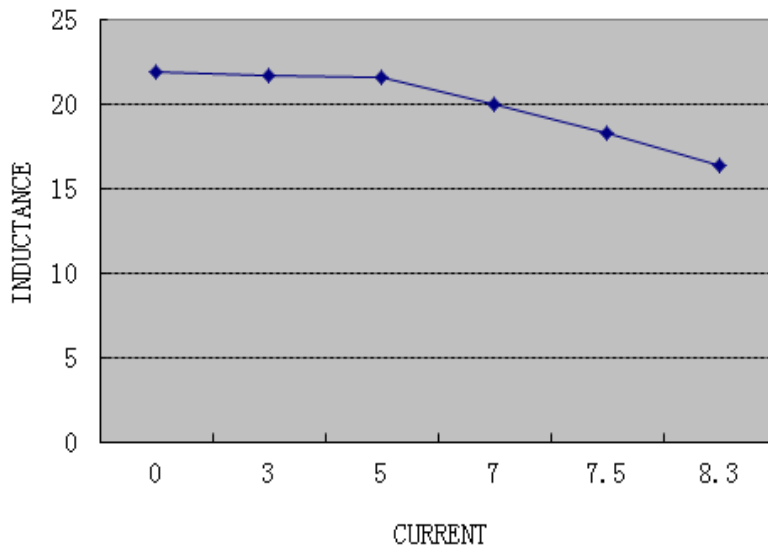

APPROVED BY 吳載敏	CHECKED BY 張明德	DRAWN BY LISA
--------------------	-------------------	------------------